



SOUND INSULATION

MULTY-LAYERED PRODUCTS WITH A HEAVY LAYER



HEAVY LAYER PRODUCT: THE ALTERNATIVE TO LEAD

Under the **APLOMB** brand, **TROCELLEN** has been commercialising for many years a multi-layer product, with one or more sheets of lead, laminated with flexible insulating materials.

Lead is not always readily accepted by installers and designers; which is why we have developed an alternative with a polyolefin heavy layer.

Advantages compared to lead

- Non-toxic.
- Combines easily with Trocellen, to obtain a completely recyclable product.
- Roll width > 1 m.
- Available everywhere

Disadvantages compared to lead


- For an equal weight in grams, greater thickness must be used: This causes a more rigid final product.
- More elastic; less malleable than lead.
- More voluminous.
- Fire retardant.

The **ISOLMASS** line

A multi-layered product range, with heavy sleeve, laminated with flexible, resilient, and sound absorbing materials.

■ Composition

- Layer of polyethylene foam (anti-vibration), thickness 3 mm.
- Heavy layer weighing 4 kg/m².
- Polyurethane open cell layer (sound absorption), thickness 12 mm.

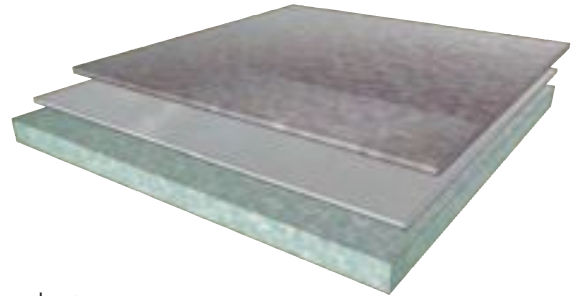

■ **Size:** sheets 1.2 x 3 m.

■ **Packaging:** rolled in cardboard box (0.25 x 0.25 x 1.25 m).

■ Applications

Sound insulation of waste water piping in polyethylene or PVC. The product must be installed with the polyurethane in contact with the pipe. Wrap it around the pipe, taking care not to leave any exposed parts and secure it mechanically with straps or metal wire. Wrap it around the pipe, taking care not to leave any exposed parts and secure it mechanically with straps or metal wire


Sound insulation of walls – evaluation index, with a sample curve at 500 Hz, calculating the frequency range between 100 and 3,150 Hz (ISO 140-3, ISO 717-1): $R_w = 25$ dB.



Trocellen 3 mm

HL 4 kg/m²

PU 12 mm

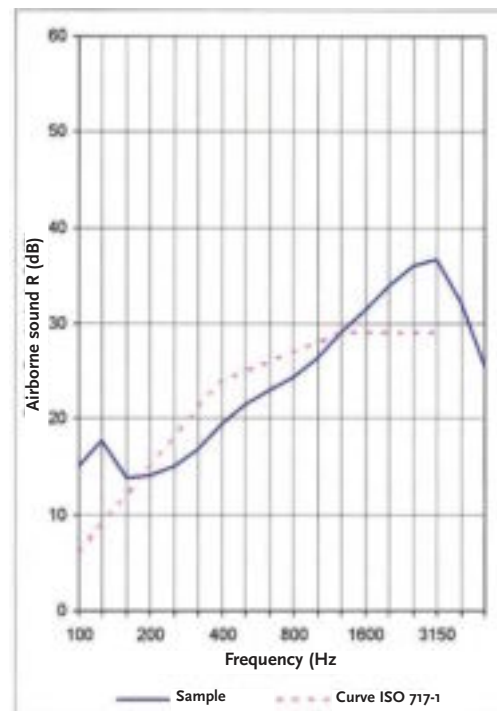




Trocellen 3 mm
HL 4 kg/m²
Trocellen 3 mm

■ **Composition:**

- Layer of polyethylene foam (anti-vibration), thickness 3 mm.
- Heavy sleeve layer weighing 4 kg/m²
- Layer of polyethylenene foam (anti-vibration), thickness 3 mm.

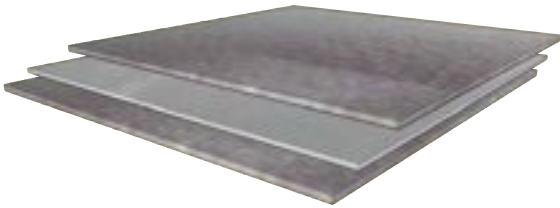


- **Size:** sheets 1.2 x 3 m.
- **Packaging:** rolled in cardboard box (0.25 x 0.25 x 1.25 mm).
- **Applications:**

Flooring underlay and in civil construction walls.

It is used to reduce low frequency sound waves, supplying mass to the partition.


Wall sound insulation - evaluation index referred to sample curve at 500 Hz, calculated in the band between frequencies 100 and 3,150 Hz (ISO 140-3, ISO 717-1): $R_w = 25$ dB.

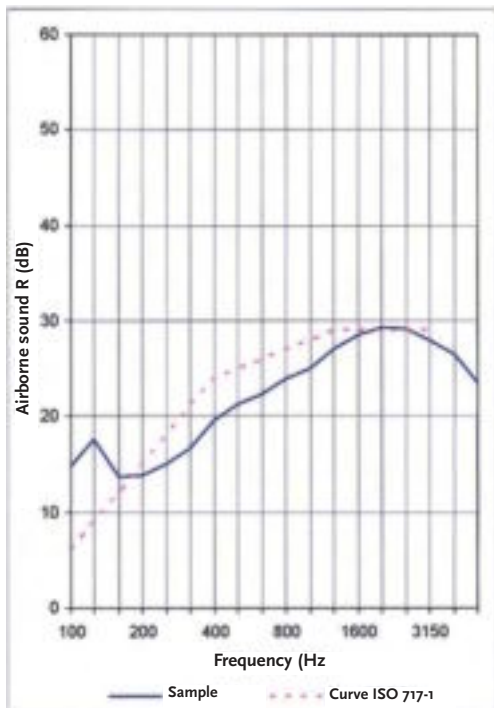

ISOLMASS DOUBLE LAYER - HEAVY SLEEVE + TROCELLEN


We have also created a set of combinations of a heavy sleeve plus a resilient **TROCELLEN** mat for every day use in the construction sector.

ISOLMASS 5PE3

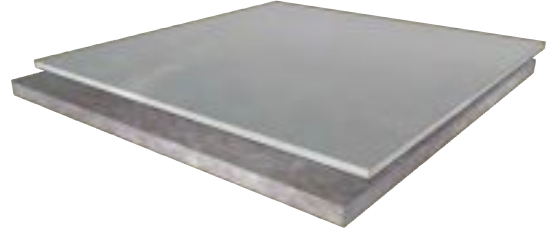

- **Composition:** 5 kg/m² and 3 mm of Trocellen.
- **Size:** sheets 1.2 x 3 m.
- **Packing:** rolled up in cardboard box (0.25 x 0.25 x 1.25 mm), or in bulk.
- **Applications:**
 - Floor and on light walls: For all uses requiring considerable mass and a desolidifying layer.

ISOLMASS 3-5PE4 P

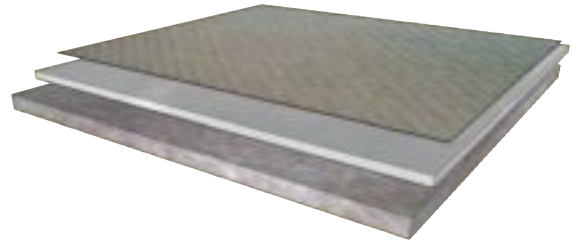

- **Compositions:** TNT, 3.5 kg/m² and 4 mm of Trocellen.
- **Size:** Rolls 1 x 8 m.
- **Packing:** 20 rolls on a pallet, with stretch film.
- **Applications:**
 - Floor and on light walls: With resilient layer of greater thickness. In this case, the sleeve is provided with a anti-abrasion textile, laminated on the surface.

ISOLMASS 2PE2



- **Composition:** 2 kg/m² and 2 mm of Trocellen.
- **Size:** Rolls 1 x 8 m.
- **Packaging:** 30 rolls on a pallet, with stretch film.
- **Applications:**
 - On floors and light walls : A combination for all ultra-thin applications.

SUMMARY

TROCELLEN ISOLMASS 11

A three-layer composite product for aerial sound insulation of waste water pipes in plastic and partitions in general. Composed of a heavy, charged polyolefinic layer, laminated on both sides with **TROCELLEN** cross-linked PE foam with a thickness of 3 mm, and open cell PU with an initial thickness of 12 mm.

Net weight: 4.4 kg/m².

TROCELLEN ISOLMASS 22

A three-layer composite product for impact and aerial sound insulation of floors and walls. Composed of a charged, polyolefinic heavy layer, laminated on both sides with **TROCELLEN** cross-linked PE foam with a thickness of 3 mm.

Net weight: 4.2 kg/m².

TROCELLEN ISOLMASS 5PE3

A two-layer composite product for impact and aerial sound insulation of floors and light walls. Composed of a heavy, charged polyolefinic layer, laminated on one side with **TROCELLEN** cross-linked PE foam, thickness 3 mm.

Net weight 5.1 kg/m².

TROCELLEN ISOLMASS 3-5PE4 P

A two-layer composite product for impact and aerial sound insulation of light floors and walls. Composed of a charged, polyolefinic heavy layer, covered on one side with **TROCELLEN** cross-linked PE foam with a thickness of 4 mm and on the other side with PP protective textile.

Net weight: 3.7 kg/m².

TROCELLEN ISOLMASS 2PE2

A two-layer composite product for impact and aerial sound insulation of light floors and walls. Composed of a charged, polyolefinic heavy layer, covered on one side with Trocellen cross-linked PE foam with a thickness of 2 mm.

Net weight: 2.1 kg/m².



INTERNATIONAL LOCATIONS

Headquarters

TROCELLEN GmbH

Mülheimer Straße 26
53840 Troisdorf
Germany
Ph. +49 2241 85 04
Fax +49 2241 85 37 53

TROCELLEN Italia S.p.A.

Via della Chimica, 21-23
20867 Caponago (MB)
Italy
Ph. +39 02 95 96
Fax +39 035 50 21 74

TROCELLEN Italia S.p.A.

Sales office
Via Dante, 3
20867 Caponago (MB)
Italy
Ph. +39 02 959 621
Fax +39 02 959 62 235

TROCELLEN Ibérica S.A.

C/Avila, s/n
28804 Alcalá de Henares
Spain
Ph. +34 91 885 55 00
Fax +34 91 885 55 01

TROCELLEN S.E.A. Sdn Bhd

Lot 2213, Kg. Batu 9 Kebun Baru,
Jalan Kasawari,
42500 Telok Panglima Garang
Selangor Darul Ehsan,
Malaysia
Ph. +60 3 3122 1213
Fax +60 3 3122 1211

TROCELLEN GmbH, UK Office

Central Chambers, 77 Westborough
Scarborough, North Yorkshire
YO11 1 TP
United Kingdom
Ph. +44 1723 376 111
Fax +44 1723 376 444

TROCELLEN Rus

141402 Moskovskaya - oblast
Himki - 2, post box 186
Russian Federation
Ph. +7 495 739 44 38
Fax +7 495 739 44 21

Polifoam Plastic Processing Co.

Ltd. Hungary
Táblás u. 32
1097 Budapest
Hungary
Ph. +36 1 347 98 00
Fax +36 1 280 67 08

www.trocellen.com



TROCELLEN
FURUKAWA Otsuka