



BROKEN TOOL DETECTOR TYPE 110



APPLICATIONS

The broken tool detectors type 110 are used to detect a break of tool or a parts presence or absence.

Each cycle, the detector needle contacts the tool to sense its presence.




TECHNICAL CHARACTERISTICS

-Technology	Pneumatic - rotating
-Stroke	126°
-Min.diameter tool	0,5 mm
-Max. distance / tool axis	120 mm
-Response time	50 ms
-Pressure required	5 bars minimum
-Operating temperature	+10°C - +60°C

ACCESSORIES



- Short fixing screw..... >REF : **0102VFTCX1**
- Long fixing screw..... >REF : **0102VFTLX1**
- Hard chromium plated needles..... >REF : **110TPGCHD**

DIMENSIONS

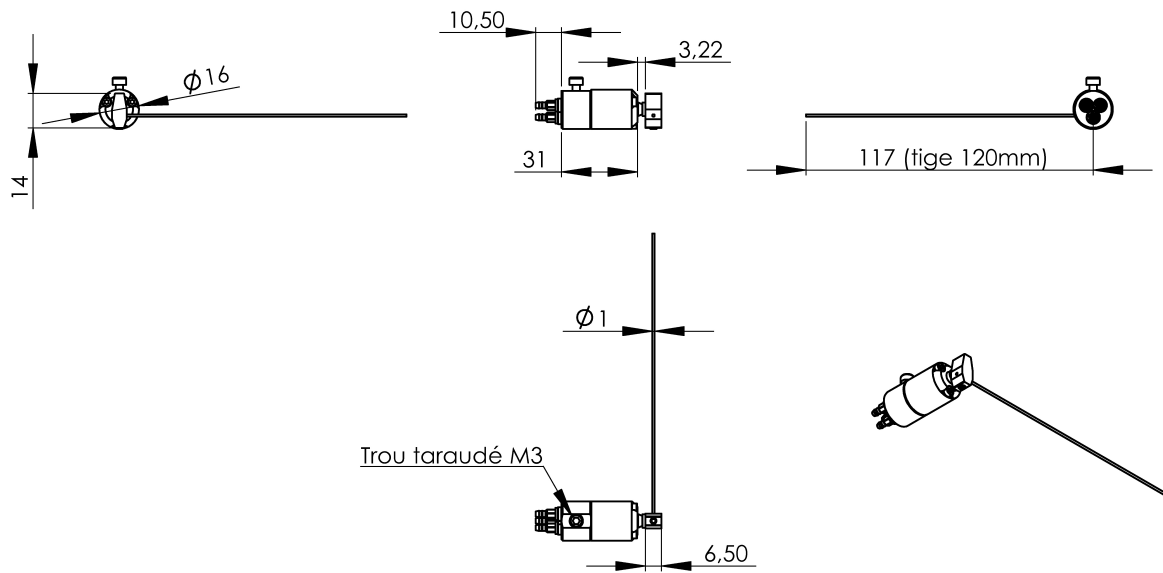

APPLICATIONS

110 - Citizen

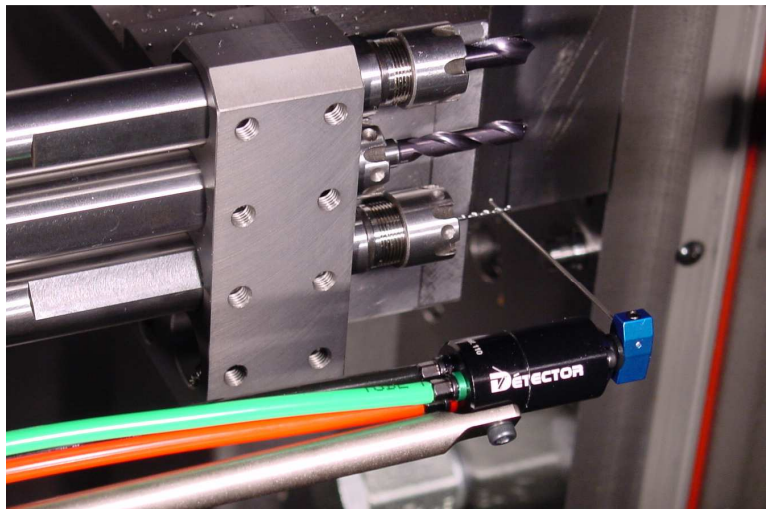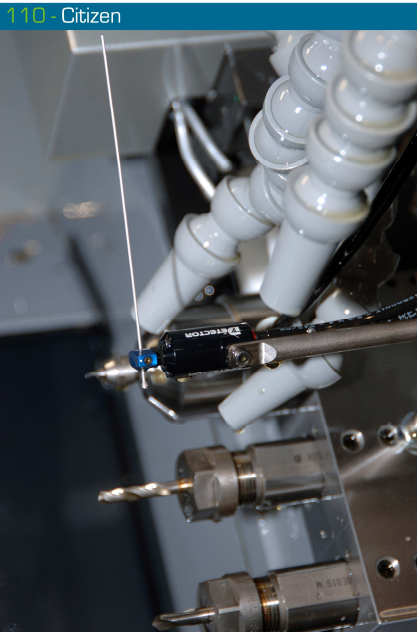

110 - Tornos Sigma 20/6