


L-filter

33824017D

ROHS compliant.

Filter resin sealed in both ends (TSE 331k ex)

All dimensions in mm.

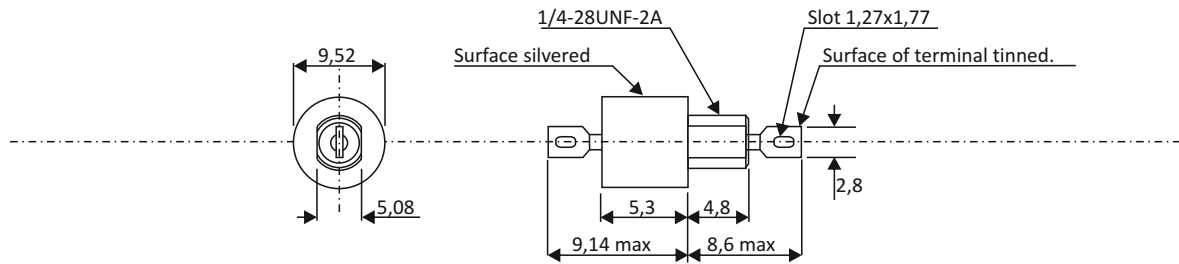

Working voltage	100Vdc
Test voltage	250Vdc 1min.
Feed-through current	max 25A
Insulation resistance	min 10000 MOhm.
IEC category	55/125/56
Capacitance (total)	1400nF min.
Inductance	2000nH min
Soldering conditions on terminals	max 250 deg C
Marking	None.
Atenuation (typical values)	
0,1MHz	25dB
1MHz	45dB
10 MHz	60dB
100 MHz	70dB
1000 MHz	70dB