


SC/UPC No Polish Fast Connector


FTTH, SC/UPC
 Field Mountable
 No Polish Fast Connector



Needed tools:

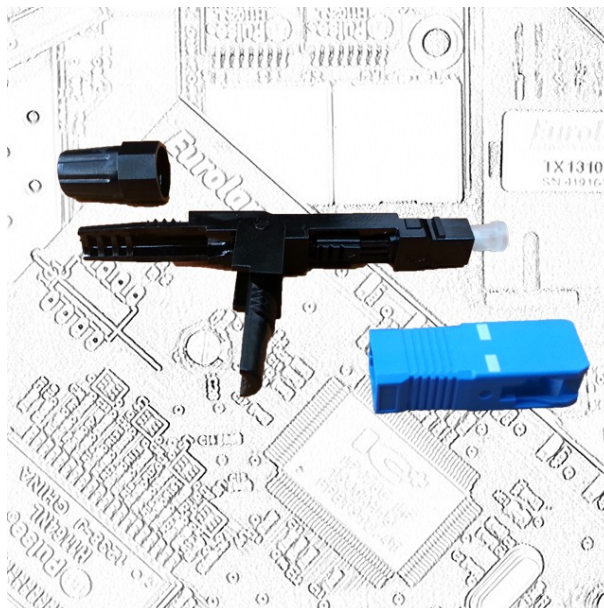

The No Polish Connector (NPC) enables fast, on-site installation using only a standard cleaver and a stripper. The SC compatible connector consists of a factory-polished ceramic fiber/ferrule assembly.

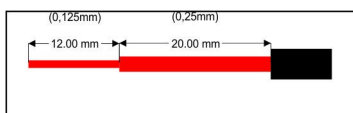

Technical Characteristics

ITEM	Technical Parameters
Cable Scope	3.1×2.0mm Drop cable
Fiber Diameter	9µm /125µm (652 & 657)
Coating Diameter	250µm
Fiber Mode	SM
Operation Time	About 10s(exclude fiber presetting)
Insert Loss	≤ 0.3dB
Return Loss	UPC≥45dB
Tensile Strength Of Fiber	>4N
Tensile Strength Of Cable	>10N
Operating Temperature	-40~+85°C
Temperature Cycle Test(168h)	IL ≤ 0.3dB
High Temperature And Moisture Test(96h)	IL ≤ 0.3dB
Drop-off Test(drop-off height 1.5m,totally 8 times)	IL ≤ 0.3dB