

Melt-Blown Polypropylene Cartridges

Introduction

Fluytec melt blown filter cartridges are made with **100% polypropylene** and provide a large contact surface for minimum pressure drop, high retention capacity and high filtering efficiency.

Applications

- Food and drink industry.
- Cosmetics industry.
- Photographic industry.
- Pharmaceutical industry.
- Fishing industry.
- Process water.
- Reverse osmosis pre-treatment.
- Water-based solutions.
- Solar heating industry.
- Petrochemical industry.


Depth filtration

Surface filtration is achieved by a filtering medium (generally very fine) the pores of which are essentially smaller than the size of the particles to be trapped. Thus solid particles are retained by direct interception on the surface of the filtering medium. This filtration is very sensitive to preferential paths and can cause an escape of solids when the filtering medium breaks.

On the other hand, in **Fluytec depth filtration** the filtering medium is thicker and its pores are smaller, equal to or greater than that of the particles to be retained. In this case, as well as direct interception, phenomena of **initial impact** and/or **diffuse interception** occur that allow particles smaller than the pores in the filtering medium to be retained.



Detail of Fluytec melt-blown polypropylene cartridge.

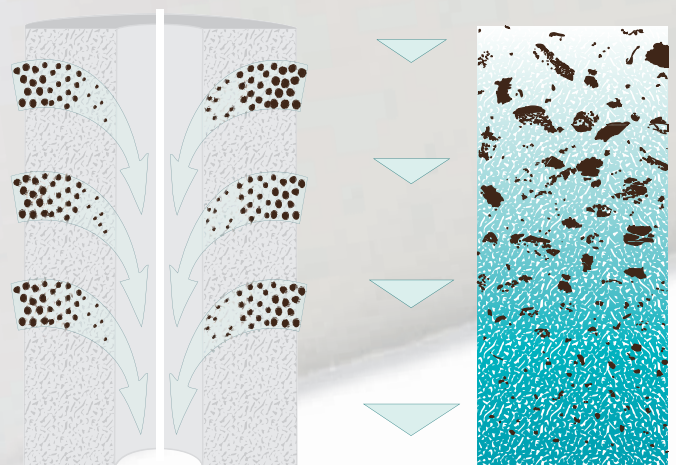

Depth filtration with Fluytec melt-blown polypropylene cartridges.

Physical properties

Filtering medium: Polypropylene

Filtering grades: 1, 5, 10, 25, 50 μm

Length (inches): 10", 20", 30", 40", 50"

External diameter: 60 mm

Internal diameter: 28 mm

Maximum operating temperature: 80°C

Differential pressure for replacement: 1.2 bar at 20°C

Coupling: Double Open End*

Packaging: Cardboard boxes on pallets

*Other special couplings to order.

Order code



	X	PPST	-	XX
Length	↑	↑		↑
	1			
	2			
	3			
	4			
Multiples of 10" (254 mm)				
Material				
Filtering medium: Polypropylene		P		
Fabrication method: Melt-blown		ST		
Degree of micron density or nominal filtering				
				01
				05
				10
				25
				50

Special measurements to order.

Example: **4PPST-50** 40" cartridge (1,016 mm) of melt-blown polypropylene cartridges nominal filtering degree of 50 μm .

Pressure drop

For Fluytec melt-blown polypropylene cartridges (10" long).

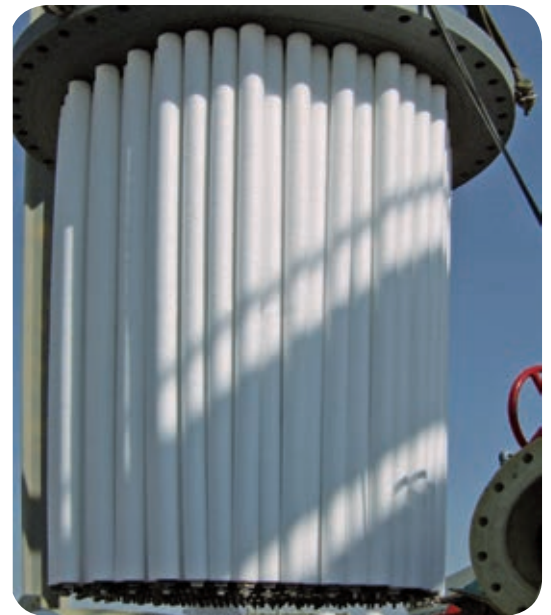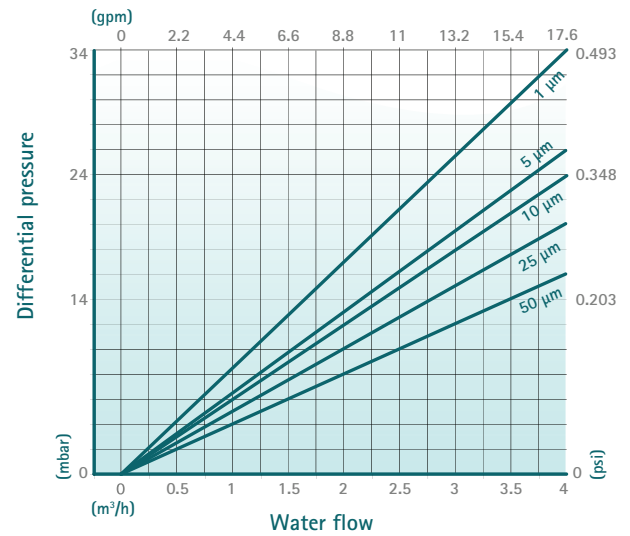

Removal of filter pack in a desalination plant in Algeria.
Production capacity: 200,000 m³/d.

Fluytec solutions worldwide

Visit our Website for more information

Subject to change without notice.

v.4



Camino Sakoni, 18 48950 Erandio, Vizcaya (Spain) | T: (+34) 944 676 150 | info@fluytec.com | fluytec.com

