Glass Vacuum Lifters

09

Bestseller Built For Saf

P11104 Intelli-Grip Dual Circuit [320kg]

This bestselling glass vacuum lifter is a convenient tool for lifting glass, metal, ceramics and other non-porous materials. The P11104 enables users to quickly manoeuvre loads into position with its 180° rotation and 90° tilt.

The P11104 vacuum lifter now includes innovative Intelli-Grip technology as standard. This pioneering safety feature monitors vacuum lifter performance, carrying out multiple diagnostics and communicating them live on a colour LCD screen. This allows the operator to determine issues such as leak rate, battery life and current lifter mode in use, but also serves as a diagnostic system for the use of the equipment.

Engineered and tested for its reliability, safety and durability, the P11104 lifter comes with a 320kg lifting capacity and onboard power with a rechargeable battery, so there are no tricky cords to deal with during operation.

An optional short hook is also available when fitting glass under soffits or overhangs.

Key Features

- Capacity: 320kg
- Dual circuit vacuum system with reserve tank, non-return valve and vacuum gauge for each circuit
- 90° manual tilting from vertical to horizontal
- 180° rotation, lockable in three positions
- Integral maintenance-free vacuum pump
- 12v rechargeable battery with integral 110v or 240v charger and battery energy gauge
- On-board Intelli-Grip control panel




| Safe working load (smooth, clean surface at 60% vacuum) | capacity: | 320kg |
|--|--|---|
| Number of suction cups | cups: | 4 |
| Suction cup | description: | black rubber, not abrasion resistant, heat resistant up to 100 $^\circ F$ |
| Suction cup diameter | diameter: | 305mm |
| Suitable for lifting | material properties: surface: example: | gastight / non-porous smooth glass, plastic boards, ceramic plates, sheet metals, coated boards |
| Weight of lifter | approx: | 41kg |
| Depth of lifter | depth: | 233mm |
| Rotation | rotation: | 90° manual left & right lockable |
| Tilt | tilt: | 90° manual |
| Vacuum system | dual circuit: | 1 pump, 2 vacuum reserve tanks |
| Voltage | pump: battery charger: | 12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable |
| Optional accessories | optional: | short hook (eye bolt), radio remote control, curved pads (270kg capacity), stone pads (270kg capacity), low marking pads, heat resistant pads |

GGR GROUP • NORTH © +44 (0)161 683 2580 • SOUTH © +44 (0)1844 202 071 • SCOTLAND © +44 (0)1698 824 444 www.ggrgroup.com





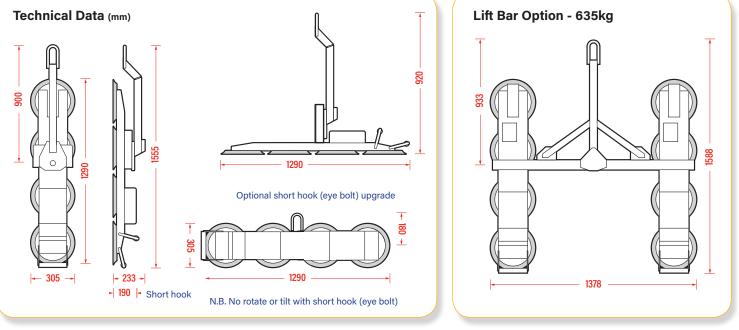

GGR GROUP • NORTH © +44 (0)161 683 2580 • SOUTH © +44 (0)1844 202 071 • SCOTLAND © +44 (0)1698 824 444 www.ggrgroup.com