


SAP

Air Separator

The air separator SAP, is inserted in the cleaning section for separating light impurities from cereal. Dust, glume, light seeds, etc. are easily removed. The grain inputted into the air separator's hopper is distributed on the whole width of the machine and passed by a counter-current air flow that allows for the suction of the lighter particles.

Beyond being used as a stand-alone machine, it can be combined with other cleaning machines such as the vibroseparator VIBROBLOCK model and the intensive scourer PO model.

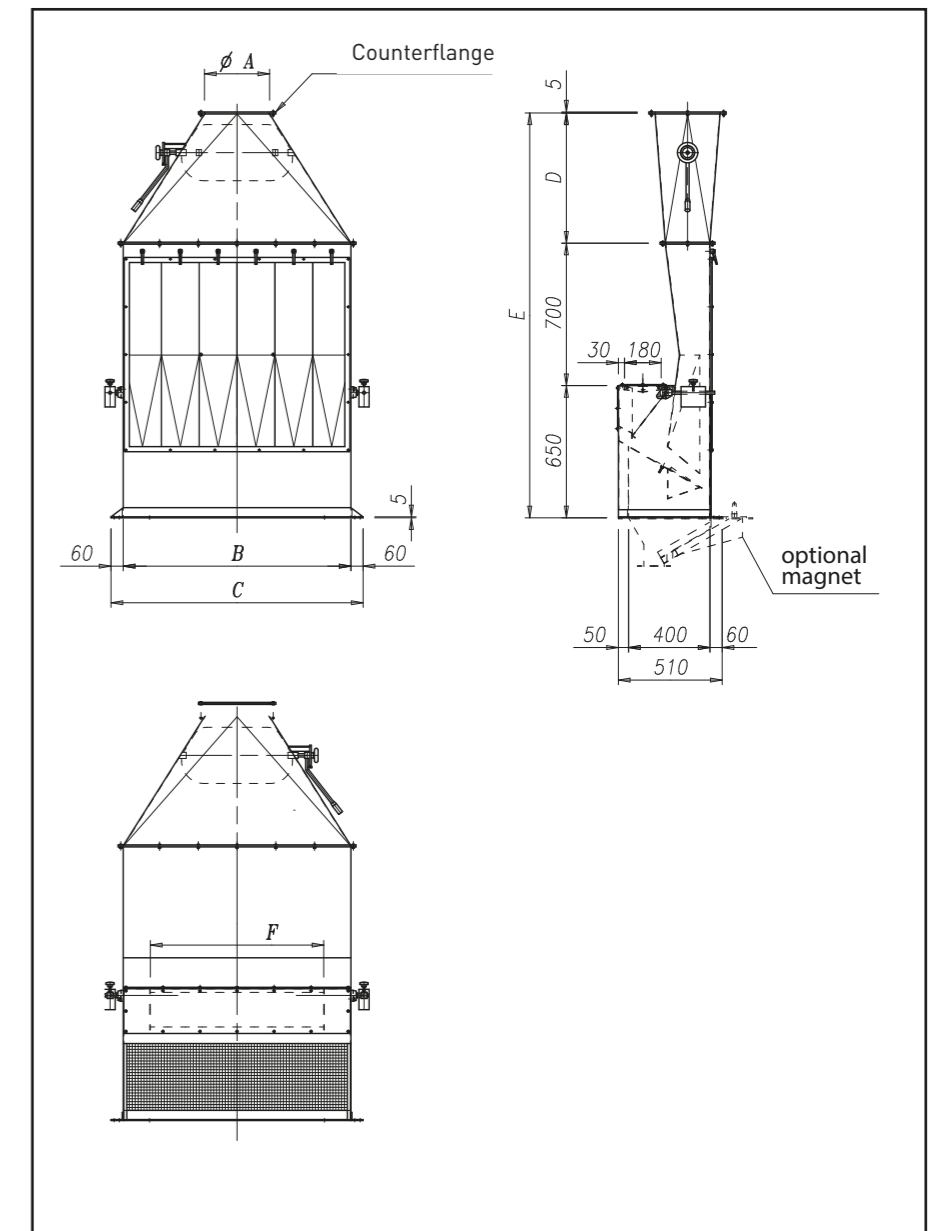

Type	*CapacityT/h		Aspiration m ³ /min		A	B	C	D	E	F	Weight Kg
	Silos	Cleaning	Silos	Cleaning							
80	30	12,5	60	40	260	747	867	370	1720	702	160
100	50	20	80	60	320	1119	1239	640	1990	1074	200
140	75	25	100	80	380	1427	1547	850	2190	1382	280
160	85	30	120	95	440	1605	1725	950	2300	1523	320

* Soft wheat 0,75t/m³
Units = mm