


FBP

Filter low pressure

Closed cylindrical structure from steel sheet. The cleaning of the sleeves is ensured by low pressure air (0,5 bar) jets inside the sleeves. Sleeves are connected to a series of electro pilots controlled by an electronic panel for the managing of time, pauses and cleaning cycles. The filter managing

and controlling system is done by control device with display directly accessible to user.

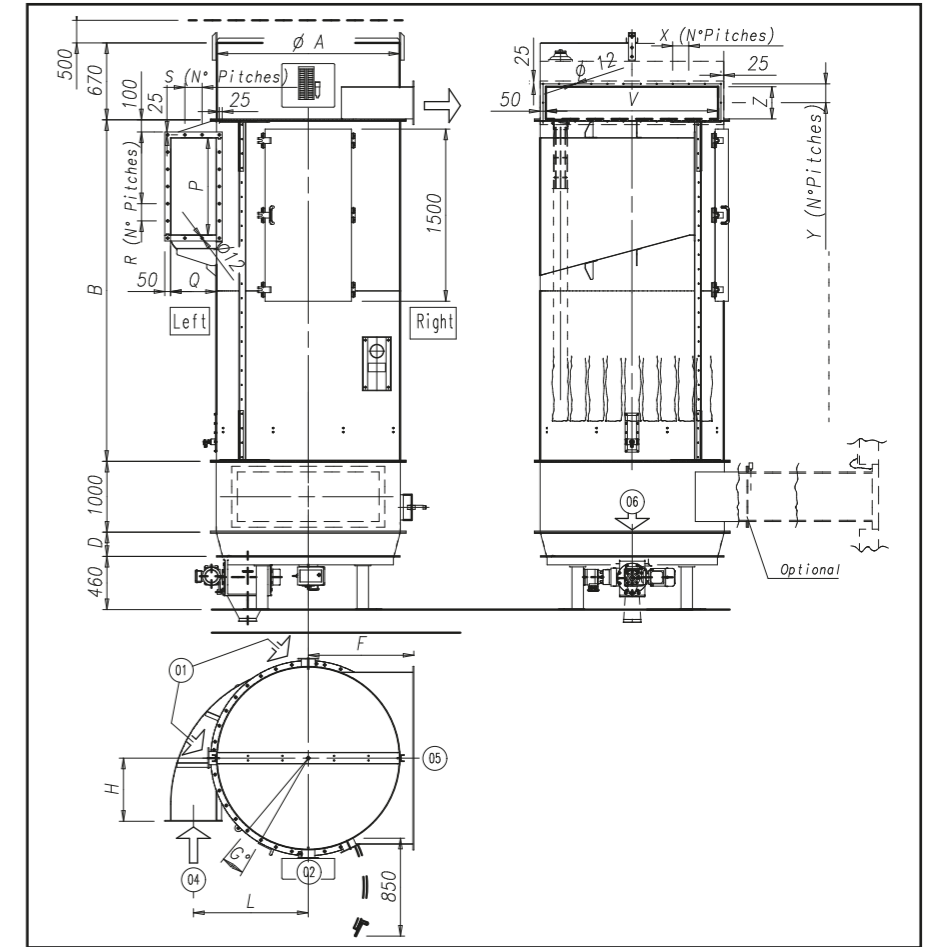

FBP	Filtration area m ²	ØA	Sleeves N° Length	B	D	F	H	L	G°	PxQ	R(N°)	S(N°)	VxZ	X(N°)	Y(N°)	MxN	O	Weight Kg
36/25	33.9	1300	36 2500	2700	-	770	450	805	10°	750x310	160(5)	120(3)	800x280	140(6)	160(2)	-	-	1195
36/30	40.7	1300	36 3000	3200	-	770	450	805	10°	750x310	160(5)	120(3)	800x280	140(6)	160(2)	-	-	1390
56/25	52.7	1600	56 2500	2700	-	920	550	1000	10°	850x400	150(6)	150(3)	1500x280	141(11)	165(2)	950x950	600	1661
56/30	63.3	1600	56 3000	3200	-	920	550	1000	10°	850x400	150(6)	150(3)	1500x280	141(11)	165(2)	950x950	600	1903
72/25	67.8	1750	72 2500	2700	300	1000	600	1100	10°	1000x450	150(7)	125(4)	1451x441	150(10)	163(3)	950x950	600	1825
72/30	81.4	1750	72 3000	3200	300	1000	600	1100	10°	1000x450	150(7)	125(4)	1451x441	150(10)	163(3)	950x950	600	1963
96/25	90.4	2100	96 2500	2700	400	1120	700	1350	11,25°	1150x550	150(8)	150(4)	2100x340	165(13)	130(3)	1162x1162	750	2719
96/30	108.5	2100	96 3000	3200	400	1120	700	1350	11,25°	1150x550	150(8)	150(4)	2100x340	165(13)	130(3)	1162x1162	750	2880
120/25	113.0	2250	120 2500	2700	400	1260	800	1425	11,25°	1400x550	145(10)	150(4)	2251x441	164(14)	163(3)	1162x1162	750	3480
120/30	135.7	2250	120 3000	3200	400	1260	800	1425	11,25°	1400x550	145(10)	150(4)	2251x441	164(14)	163(3)	1162x1162	750	3790
140/25	131.9	2460	140 2500	2700	900	1350	830	1510	11,25°	1560x610	161(10)	165(4)	2561x443	167(15)	164(3)	1162x1162	750	4190
140/30	158.3	2460	140 3000	3200	900	1350	830	1510	11,25°	1560x610	161(10)	165(4)	2561x443	167(15)	164(3)	1162x1162	750	4450

Units = mm