

LU0793D and LU0808D LuOcean™ Mini Diode Laser Up to 7W, 10W or 14W output power @ 793nm or 808nm



Description:

The Lumics Medical Diode Laser series offers OEM integrators an excellent product to manufacture state-of-the-art end user laser systems. The easy integration and safe use of these medical laser components give the chance to be cost-efficient in development and manufacturing. Equipped with several accessories and features the Lumics diode lasers comply with CE & ROHS requirements. Lumics warranties highest reliability single emitter technology through careful design, extensive burn-in, long life-time & thermal testing.

Features & Functions:

- 7W, 10W or 14W optical power
- 793nm or 808nm wavelength
- 200µm NA 0.22 fiber
- Temperature sensor

Options:

- Exchangeable window
- Red or green pilot laser
- Fiber sensor
- Monitor diode
- VBG


Benefits:

- Ultra long lifetime
- Passive cooling
- Sealed housing
- Small foot print
- SMA connector

Applications:

- Dental
- Dermatology
- Therapeutic
- Veterinary

Module Drawing (Dimensions in mm)

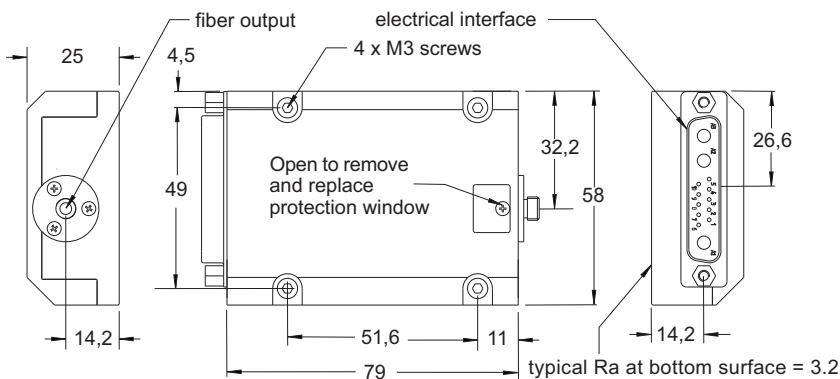

Pin Connections

Pin	Configuration
1	Fiber sensor signal 1 *
2	Fiber sensor signal 2 *
3	Fiber sensor / monitor diode cathode 12V
4	Fiber sensor (GND1) LM35 (GND1) Monitor diode (GND1)
5	LM35 signal or NTC or PT100/1000
6	Monitor diode signal 2 *
7	Monitor diode signal 1 *
8	Pilot laser (GND2)
9	LM35 5V or NTC or PT100/1000
10	Pilot laser 3.3V (red) * or <200mA (green) *


A1	Laser diode (+)
A2	Laser diode common cathode (-)
A3	N.C.

* = optional


Fiber Connector

Lumics laser diode fiber coupling technology ensures loss into the fiber cladding of <1.5% upon compliance with the following strict recommendations:

- (1) Use a fiber microscope to check for dust free fiber end facet and fiber centricity, or with a quick check by turning the SMA fiber ferrule between 0°-180° at minimal possible output.
- (2) Fiber connector to the Lumics laser module without mode stripper can sink a maximum of 4W (1.4% loss from 280W).
- (3) Use transparent and high temperature fiber epoxy (e.g. Epotek ND353) to ensure that fiber is firmly fixed to the connector at 70°C
- (4) 105µm fiber core max. fiber to connector excentricity +/- 5µm
>105µm fiber core max. fiber to connector excentricity +/- 10µm
- (5) Use large cladding diameter as (105/600)µm or (200/500)µm fiber for a free standing fiber to enhance stability and low bending to maintain centricity
- (6) For <=105µm fiber core: a large cladding 105µm/600µm not free standing fiber can be used

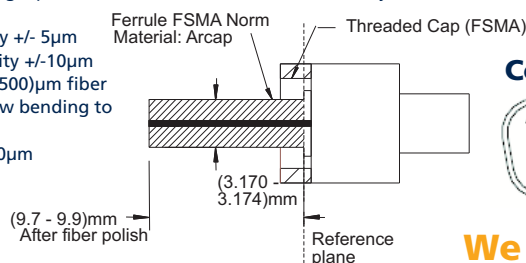

Connector



We manufacture diode lasers.

Electrical and Optical Characteristics Typical laser specifications at 25°C

Parameter	Type / Conditions	793nm 7W in 200µm	793nm 10W in 200µm	793nm 14W in 200µm	808 nm 7W in 200µm	808 nm 10W in 200µm	808nm 14W in 200µm	Unit
Optical Characteristics								
Output power	P_{op} (c.w.)	7	10	14	7	10	14	W
Peak wavelength (at P_{op})	λ_{peak}	793 ±5	793 ±5	793 ±5	808 ±5	808 ±5	808 ±5	nm
Spectral width (FWHM)	λ_{FWHM}	6	6	6	6	6	6	nm
Conversion efficiency		38	38	38	38	38	38	%
Spectral shift with temp.	λ_{T_shift}	0.3	0.3	0.3	0.3	0.3	0.3	nm / K
Fiber core diameter		200	200	200	200	200	200	µm
Fiber centricity		<10	<10	<10	<10	<10	<10	µm
Numerical aperture	NA	0.22	0.22	0.22	0.22	0.22	0.22	
Fiber connector type		SMA905	SMA905	SMA905	SMA905	SMA905	SMA905	
Electrical Characteristics								
Forward current at P_{op}	I_{op}	8.7	6.8	6.8	8.7	6.8	6.8	A
Abs. max. forward current	I_{max}	9.3	8.0	8.0	9.3	8.0	8.0	A
Forward voltage	V_{op}	1.8	3.6	5.5	1.8	3.6	5.5	V
Threshold current	I_{th}	1.8	1.8	1.8	1.8	1.8	1.8	A
Red Pilot Beam (Option)								
Pilot beam output power		1	1	1	1	1	1	mW
Pilot beam wavelength		635 ±10	635 ±10	635 ±10	635 ±10	635 ±10	635 ±10	nm
Pilot beam operating voltage		3 ±0.3	3 ±0.3	3 ±0.3	3 ±0.3	3 ±0.3	3 ±0.3	V
Pilot beam operating current		45 ±10	45 ±10	45 ±10	45 ±10	45 ±10	45 ±10	mA
Green Pilot Beam (Option)								
Pilot beam output power		>5	>5	>5	>5	>5	>5	mW
Pilot beam wavelength		520 ±10	520 ±10	520 ±10	520 ±10	520 ±10	520 ±10	nm
Pilot beam operating voltage		7.0	7.0	7.0	7.0	7.0	7.0	V
Pilot beam operating current		200	200	200	200	200	200	mA
Sensors								
Power monitor operating voltage (Option)		12	12	12	12	12	12	V
Power monitor signal voltage		0 - 4	0 - 4	0 - 4	0 - 4	0 - 4	0 - 4	V
Fiber detection sensor operating voltage (Option)		12	12	12	12	12	12	V
Fiber detection sensor signal voltage		12 / 0	12 / 0	12 / 0	12 / 0	12 / 0	12 / 0	V
Temperature sensor		LM35 or NTC or PT100/1000						

Remarks:

- (1) Proper function of fiber sensor requires FSMA ferrules made of steel oder ARCAP. Do not use copper made ferrules.
- (2) Required flatness of customer heat sink 0.05mm over 200mm.
- (3) VBG (Volume Bragg Grating) ensures that 95% of optical output power is within +/-0.5 nm of specified wavelength.



Important Note

Read and carefully follow operating manual instructions. Especially - whenever power supply is switched on or off, always disconnect from laser module. See manual for details. Uncontrolled on / off switching may cause spikes and result in fatal device damage.

General Parameters / Accessories

Parameter	Symbol	Min	Typ	Max	Unit
Storage temperature	T _s	0		50	°C
Operation temperature	T _{op}	15		35	°C
Humidity / non-condensing atmosphere				90	%
Recommended thermal heatsink resistance				0.1	K / W
Weight			ca. 200		g
Compliance			CE, ROHS		
Standard Accessories					
Interface connector			13W3 Female		
Mounting screws / metric			4 x M3 x 10		
Further Options					
2nd monitor diode / 2nd fiber detection sensor (Please ask for quotation if needed)					
Optical fiber patchcord with SMA connectors					
Laser diode drivers on request					

User Safety



We manufacture diode lasers.