

**testo 106-T1/-T2**

The testo 106 penetration thermometer is ideal for quick, uncomplicated core temperature checks in all industries i.e. caterers, hotels, canteens, supermarkets etc.

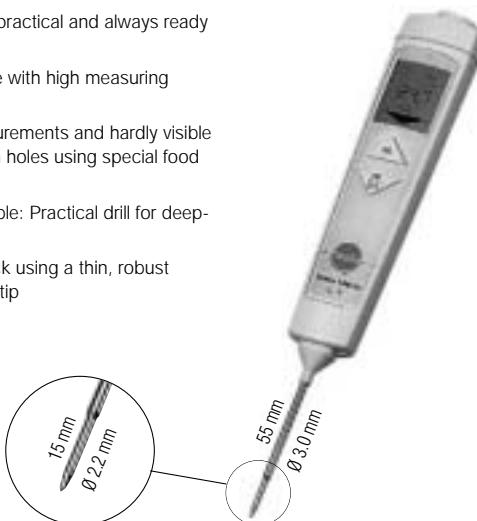
testo 106-T2 with audible alarm if limits are exceeded.

**testo 106-T1, penetration thermometer with probe protection cap and battery**

Part no.  
**0560 1061**

**Quick-action penetration thermometer**

- Compact, practical and always ready to hand
- Wide range with high measuring accuracy
- Fast measurements and hardly visible penetration holes using special food probes
- Also available: Practical drill for deep-frozen food
- Quick check using a thin, robust measuring tip


**Technical data**

Meas. range	-50 to +230 °C
Accuracy	±1% of mv (+100 to +230 °C)
±1 digit	±0.5 °C (-30 to +99.9 °C) ±1 °C (-50 to -30.1 °C)
Resolution	0.1 °C
Oper. temp.	-20 to +50 °C
Storage temp.	-40 to +70 °C
Battery type	Lithium battery (2032)
Battery life	250 h
Dimensions	215 x 34 x 19 mm
Display	LCD, 1 line
Material/Housing	ABS
Weight	80 g
Protection class	IP67 with TopSafe
Warranty	2 years

**Set**
**Part no.**

testo 106-T1 set, penetration thermometer w. TopSafe (waterproof case, IP67), 0563 1061 holding clip, probe cap and battery

testo 106-T2 set, penetration thermometer w. alarm, incl. TopSafe (waterproof protection case, IP67), holding clip, probe cap and battery

**Accessories**
**Part no.**

Frozen food drill ; Can be attached to holder clip 0554 0826

TopSafe (indestructible protection case); Waterproof and dishwasher-safe protection case (IP67) 0516 8265

Holder clip with probe protection cap 0554 0825

**Accessories**
**Part no.**

ISO calibration certificate/Temperature ; For air/immersion probes, calibration point +60°C 0520 0063

ISO calibration certificate/Temperature ; For air/immersion probes, calibration point -18°C 0520 0061

ISO calibration certificate/Temperature ; For air/immersion probes, calibration point 0°C 0520 0062

ISO calibration certificate/Temperature ; For air/immersion probes, calibration points -18°C; 0°C 0520 0041

ISO calibration certificate/Temperature ; For air/immersion probes, calibration points -8°C; 0°C; +40°C 0520 0181

**testo 105**
**Robust one-hand thermometer**

The robust food thermometer with interchangeable measurement tips for control measurements in abattoirs, refrigerated storerooms, lorries etc.

- 2 user-defined limit values, alarm visual or audible
- Built-in backlit display
- Audible key feedback
- 2 line display
- Waterproof (IP 65) and robust



**testo 105, One-hand thermometer with standard measurement tip, incl. battery**

Part no.  
**0563 1051**



Easy-to-change measurement tips

**Technical data**

Meas. range	-50 to +275 °C
Accuracy	±0.5 °C (-20 to +100 °C)
±1 digit	±1 °C (-50 to -20.1 °C) ±1 % (+100.1 to +275 °C)
Resolution	0.1 °C
Oper. temp.	-20 to +50 °C
Storage temp.	-40 to +70 °C
Dimensions	145 x 38 x 195 mm
Display	LCD, 1 line
Weight	139 g
Protection class	IP65
Warranty	2 years

**Set**
**Part no.**

One-hand thermometer with standard measurement tip, frozen food tip, long measurement tip and belt/wall holder in aluminium case 0563 1052

**Accessories**
**Part no.**

Standard measurement tip, 100 mm long 0613 1051

Frozen food tip, 90 mm long 0613 1052

Long measurement tip, 200 mm long 0613 1053

Aluminium case for the testo 105 one-hand thermometer and accessories 0554 1051

ISO calibration certificate/Temperature For air/immersion probes, calibration points -18°C; 0°C 0520 0041

Button cell batteries, Type LR 44, 1.5 Volt (4 off) 0515 0032