



Designer Manufacturer

AGRO PM

Food-safe protective cabinet - Small Model

Designed to house a complete computer workstation: monitor, base unit, printer and keyboard

Characteristics:

- The body of the cabinet is a single, thermoplastic form, meaning the front and rear structure are a single structure;
- Watertight, smooth surface for easy cleaning;
- The body is an extruded, composite material, 19 mm thick, making it watertight and mechanically strong, preventing condensation build-up and the development of micro-organisms;
- No sharp corners, preventing the build-up of waste/dirt;
- Connectivity: the cabinet is supplied with:
 - A strip of three 220V 10/16A electrical sockets with its own illuminated master switch.
 - Two standard cable glands (7 to 13 mm) to allow cables to enter the cabinet.

Front panel:

- Cabinet opening/closed by a shutter blind manufactured using thermoplastic strips and mounted on two PVC rails, fitted with seals to assure the cabinet remains leaktight;
- Two adjustable shelves: one for the monitor and the other for a labelling machine and/or a weighing machine, with the option of sliding shelves (See Option PM 401);
- Sliding polyethylene keyboard shelf;
- Handling: centrally mounted handle on the sliding shutter blind.

Rear panel:

- Removable rear panel which can be slid down to facilitate access to the computer equipment within.

Advantages:

- IP 65 protection and leaktightness
- Optimised working space
- Fully modular internal structure

Also exists in a larger model: AGRO GM



AGRO PM DIMENSIONS (mm):

Overall external	W 600 x D 623 x H 1 000 mm
Usable internal	W 510 x D 500 x H 910 mm

AGRO PM with PM 401 option

AGRO PM open with keyboard shelf extended

AGRO PM with shutter closed



Fixed and mobile workstations

DESCRIPTION OF OPTIONS...

*The AGRO protection system
for all your computer equipment*

Option PM 401

- Shelf extension distance: 401 mm;
- Designed for a labelling machine;
- Telescopic shelf on stainless steel runners with plastic rollers.




Option KDL

- Opening cable gland system designed to allow cables to be connected without having to remove their end pieces;
- The cable glands are in two sections which hold the cables in leaktight seals;
- Generally fitted to the right hand side panel, assuring a leaktight cabinet.



LEGS or WALL MOUNTING option

- Legs in brushed stainless steel (304);
or
- WALL MOUNTING using brushed stainless steel (304) tubing.

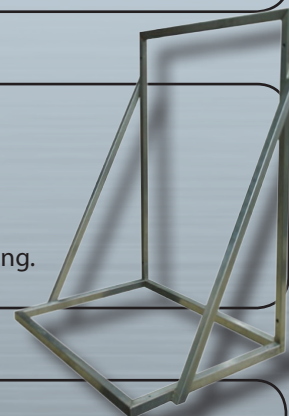

TOUCH SCREEN INTEGRATION option

- The possibility of integrating a touch sensitive screen.



Additional options:

- Additional shelving;
- PAC PM: Permanent cabinet protection using a transparent PMMA screen behind the sliding blind
 - HC 1: Partial protection of either upper or lower compartment;
 - HC 2: Total protection for both compartments;
- Sloping roof;
- Lock;
- ECA: Heat extraction ventilator;
- IP 66 waterproof mouse and keyboard;
- etc.