

Assembly tiltable table

45.07

With sideways recess



Operating range:

For the production of wood-, Aluminium-, and plastic windows

The following activities can be executed horizontally, as well as vertically:

- Delivery of horizontal to vertical finishing level
- Sealing-, and fitting assembly on frames
- Leaf-, and frame assembly
- Glass configuration
- Assembly of additional profiles
- Customized works


Technical edition, standard:

- Pneumatic tiltable installation with hand valve 5/3
- Hinged roller conveyor at the bottom, B= 100 mm
- Working surface covered with sliding strips
- Sideways recess

Additional equipment:

- Horizontal clamping cylinder
- Chassis
- Upper layer extendable (1700 – 2200 mm)
- Pneumatic hinged roller conveyor
- Pneumatic lifting device
- Working surface covered with filt- and bush strips

illustration with chassis and extendable upper layer

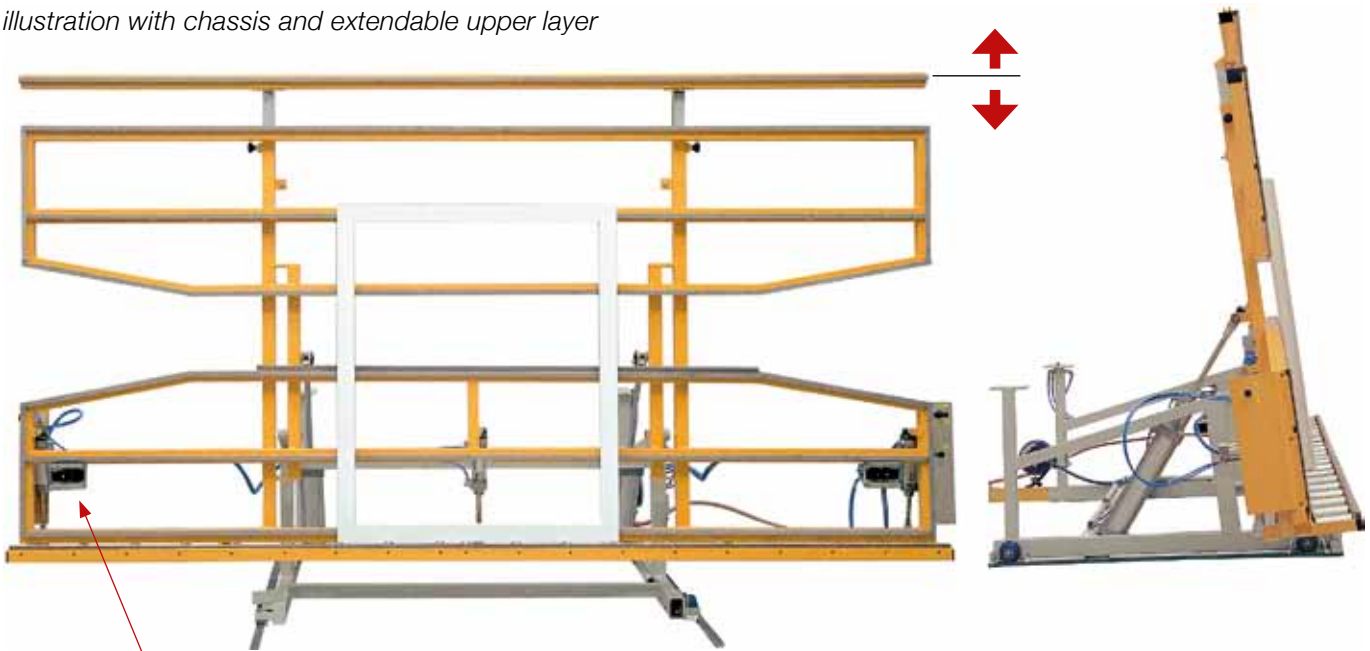

Pneumatic horizontal clamping cylinder

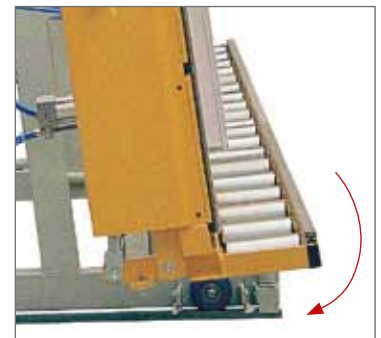


Illustration with pneumatic hinged roller conveyor

Assembly-tiltable table in standard edition	Working width: 2600 mm	45.07V004
	Working width: 3000 mm	45.07V005
	Working width: 3600 mm	45.07V006
	Working width: 4000 mm	45.07V007
Pneumatic hinge installation, hinge= 500 mm	For working width up to: 2600 mm	45.07K009
	For working width up to: 4000 mm	45.07K010
Horizontal clamping cylinder with hand valve	Clamping range: 105 mm	45.01B020
	Clamping range: 140 mm	45.01B021
Two-rail chassis with brake		36.06K007
Two-sided rail		36.06K015