

# Vibro-SH

## ANTIVIBRATION HANGERS FOR FALSE CEILINGS

### APPLICATIONS

Tα **Vibro-SH** can be used for antivibration hanging for sound insulating false ceilings, antivibration suspension of pipes, air-ducts, loudspeakers etc.


### DESCRIPTION

Antivibration hangers for false ceilings **Vibro-SH** consist of metal frame made of galvanized sheet, properly formed with lateral strength, steel spring, antivibration rubber element at the bottom of the spring that acts as a sound break and increase isolation efficiency. They can also be pre-loaded by tightening the nut.

### DYNAMIC CHARACTERISTICS

**Deflection (at maximum load) : 25 mm**

**Natural Frequency (at maximum load) : 6 Hz**

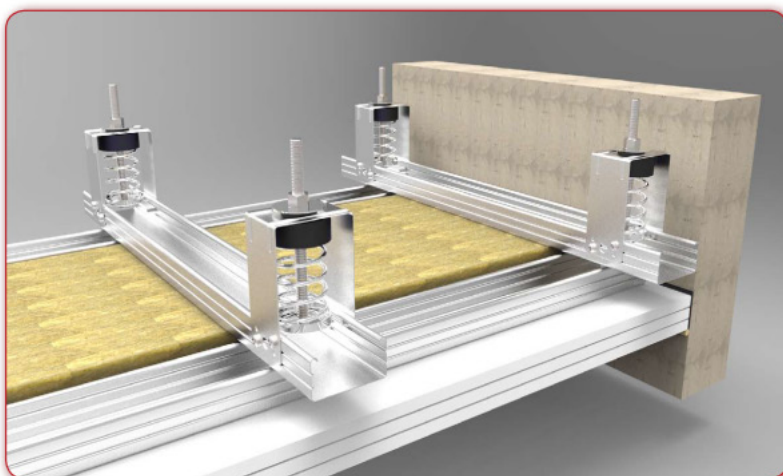

*Design and production according to International Standard ISO 9001.2008.*

**ALPHA ACOUSTIKI LTD**

73 Apostolopoulou St. Chalandri 15231 Greece

T: +30 210 6779875 - F: +30 210 6779269

[www.vibro.gr](http://www.vibro.gr) - [info@vibro.gr](mailto:info@vibro.gr)