

N1 ROLL FORMING LINE mod. PRH 16/250
for "vine peg" profile

MAINS FEATURES

. Material to be processed		:	Coils
- definition		:	Mild / galvanised steel
- Type		:	according to decoiler
- Max weight	Kg	:	30
- Maximum thickness	mm	:	12
- Max. production speed	m/1'	:	400
. Electrical supply	V	:	50
	Hz	:	
. Going sense		:	left/right
. Total installed power	a.c.	HP	: 18 (control / inverter)
	a.c.	HP	: 12,5

DESCRIPTION



① ROLL FORMING MACHINE PRH 16/250

. Maximum width between stands	mm	:	250
. Maximum width over stands	mm	:	0
. Diameter of shafts	mm	:	55
. Number of forming stations	N	:	12 (frame allowed for 16)
. Motors	HP	:	18

- **one piece table**, from planed steel with lining up grooves for the transmission uprights
- N12 **stations** with special **cast-iron stands**, housing large bearings of the best domestic and foreign brands.
- Steel roller shafts, entirely ground with 10 mm slots.
- **Upper roller shafts adjustable** according to the thickness to be worked, with graded vernier scale for setting.
- **Adjustable** introducing **guides** to line up the strips on the different sets of rolls
- Group of straighteners lined up on each set of rollers
- Geared motors (with electronic control), **HP 22+22** with **direct connection** to the powering's shaft
- **One piece transmission shaft** Ø mm 40 from the motor **to the different stations** with conical gears
- **Full direct driving** from reduction gear + n2 introduction **stations independently coupled**
- Start up directly from the main electrical panel, or from a **remote control** box with forward and backward.


② ELECTRICAL EQUIPMENT AND HANGING UP ADJUSTABLE CONTROL PANEL

- industrial **P.C.** mod **SNAP** :
 - **graphical** l.c.d. **touch screen**
 - **windows XP** operation
 - **P.C.** office **connection**
- independent **CNC control** of :
 - punching
 - cutting
 - synchronisation control for introducing / punching – cutting / roll forming



③ HYDRAULIC PLANT


- . Tank L : 150
- . Hydraulic unit motor pump HP : 12,5



- Adjustable frame after the rolling machine, for the right positioning and lining up of the different cutting units with the suited sets of rolls.

④ SETS OF ROLL FORMERS

in special tempered and rectified steel as drawings attached



- N1 **complete** set of combined **roll formers + straighteners** for "**vine peg**" profile




⑤ HYDRAULIC PUNCHING TOOLING

Tooling fixed between stations n°3 & 4

- complete hydraulic **devices** for **auto. punching on line**
- **CNC** control (pitch, n° of holes, time etc...)
- electronic position sensors




N1 complete **hydraulic tooling** for n2 "**Z**" holes

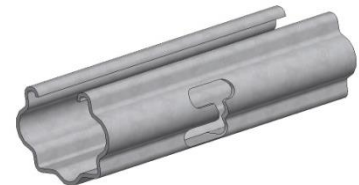

⑥ HYDRAULIC CUTTING TOOLING

- **complete** of **blades & dies**, hyd. cylinder electronic **sensor**
- **CNC** control



N1 **complete** hyd. **cutting** unit for "**vine peg**" profile

