

Watson 2500



2500TM

Model 2500 Rigs

Available truck or crawler mounted, with a variety of mast and kelly configurations.

Versatile and easy to move.... spend more time turning to the right.




2500 Info



2500CM Short Mast



2500TM

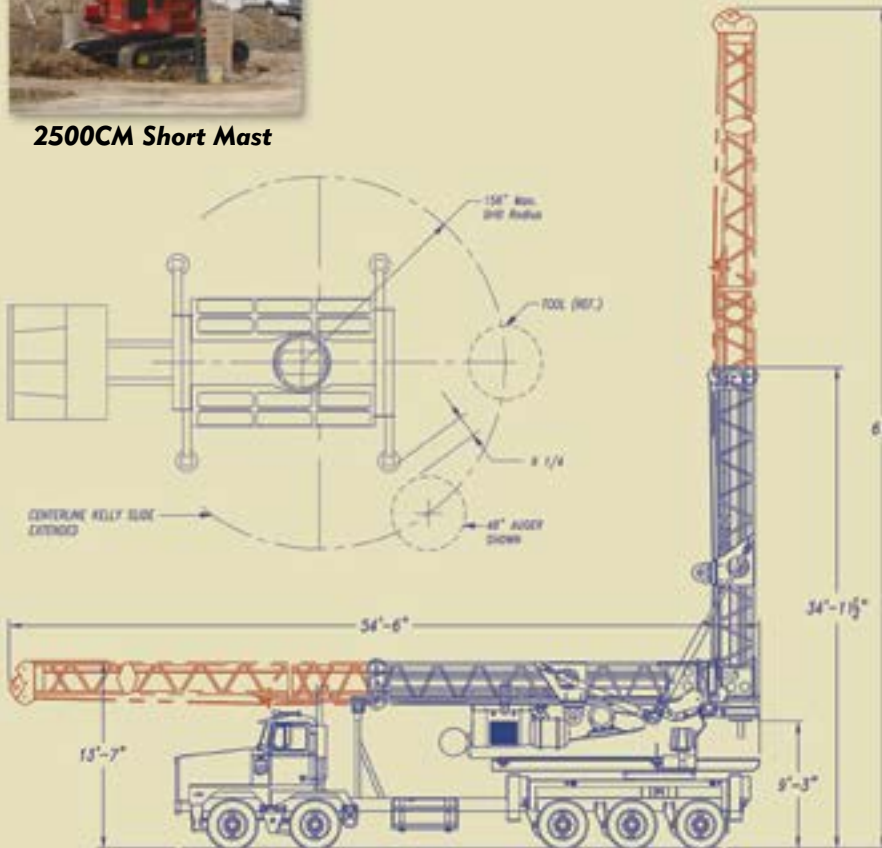

Features:

- John Deere 173hp diesel engine
- Inner kelly winch has "controlled freefall" feature
- Telescoping dry kellys
- Multiple kelly configurations
- Mechanical drive train with torque converter driven powershift transmission.
- Two (2) independently controlled raising cylinders
- Travel position height and gross weight allow single load transport
- Out/down outriggers on cab end, stabilizers on drill end

Options:

- Available mounted on a truck or crawler undercarriage
- Various kelly/mast configurations for alternate drill depths
- Operator cab with optional heat and AC
- Electronic depth and level indicators
- Crane carrier or conventional truck mounting
- A-frame outriggers on drill end
- High/Low pressure air drill
- Water tank
- Rathole Rigs

Specifications:	SAE UNITS	ISO
Max Hole Diameters	84 in	213 cm
Max Hole Depth - Tall Mast	120 ft	36.6 m
Max Hole Depth - Short Mast	60 ft	18.3 m
Rotary Torque	82,000 ft lb	111 kNm
Crowd Force	38,000 lb	169 kN
Kelly Winch Capacity	25,000 lb	111 kN
Kelly Winch Hoist Speed	200 fpm	61 mpm
Service Winch Capacity	12,000 lb	54 kN
Truck Rig Weight	71,180 lb	32,287 kgs
Crawler Rig Weight	64,000 lb	29,029 kgs

Specifications subject to change depending on configuration.