

E 7050

SP240



SOIL DISPLACEMENT KIT



E 7050

SP240

SOIL DISPLACEMENT KIT

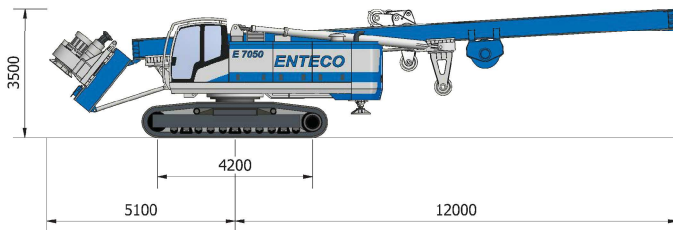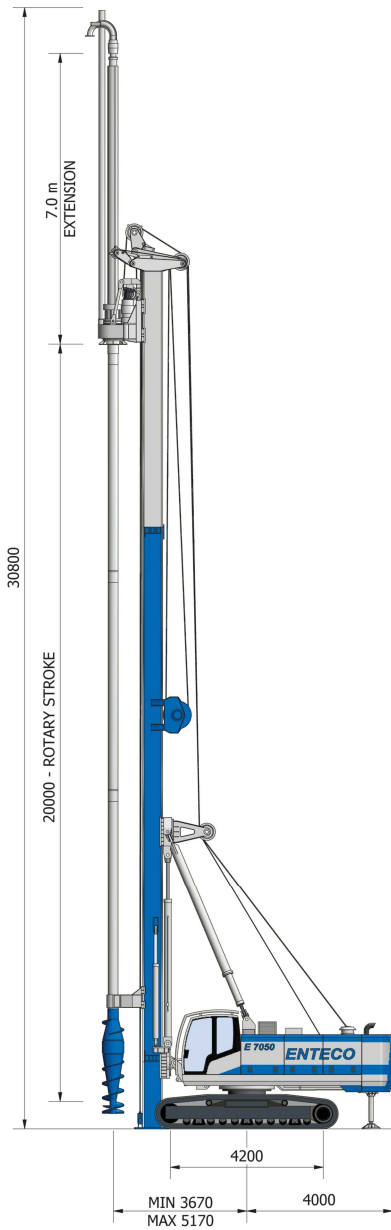

E 7050 - SP240 SOIL DISPLACEMENT KIT

OPERATING WEIGHT	ton	up to 60
Drilling diameter	mm	320+620
Max drilling depth	m	32

MAST

Mast vertical travel	mm	1800
Mast forward stroke	mm	1500
Front/Rear inclination		+5°/-15°
Side inclination		±5°

CROWD SYSTEM

WINCH

Rotary stroke	mm	20000
Crowd force	kN	200
Extraction force	kN	530

ROTARY

Model		ENTECO RH41/2
Max torque	kNm	245
Max drilling speed	rpm	39+60
Kelly extension	m	3,7,12

E 7050 - BASE MACHINE

CRAWLERS

Overall width	mm	3000+4200
Track pads (900mm optional)	mm	700
Tramming speed	km/h	2

DIESEL ENGINE

Model	CATERPILLAR	C7 ACERT	C9 ACERT
Max power	HP/kW	250/186	350/261
Fuel tank capacity	litres	400	

MAIN WINCH

Max line-pull 1st layer	kN	165
Free-fall device		option

AUXILIARY WINCH

STANDARD OPTION

Max line-pull 1st layer	kN	50	100
Free-fall device		option	installed

COUNTERWEIGHT

Total weight	kg	6000
Counterweight stroke (optional)	mm	1500



Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA
 Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com

E7050 - SP240 107Q-004 20120321