

The material receivers LDM series are made of stainless steel and LDX series with a central pyrex-glass body. Available application with three-phase hopper loader. 8 models from 2 dm<sup>3</sup> to 200dm<sup>3</sup>.



#### TECHNICAL SPECIFICATIONS:



- Stainless steel structure.
- Hinged cover.
- High-depression operation.
- Automatic cleaning of the filter.
- Discharge valve and wear-resistant gasket.
- Metal filter air vent.

#### ACCESSORIES:

- Pneumatic discharge.
- Proportional valve.
- Level feeding sensor.

#### ADDED VALUE:

- Easy to use.
- Easy cleaning and maintenance.
- Safety and reliable.
- Quick installation with a 360° orientation
- Alarm warning device

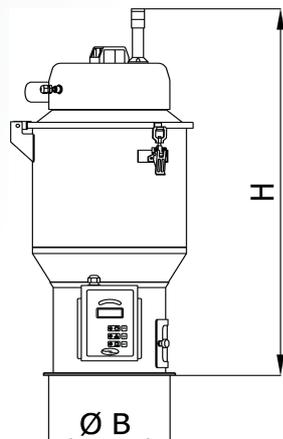

LDM receiver



LDX receiver

TECHNICAL DATA		LDM2	LDM4	LDX4	LDM5	LDX8	LDM10	LDM25	LDX25	LDM50	LDM100
Capacity	dm <sup>3</sup>	2	4	4	5	8	10	25	25	50	100
Centre distance	mm	210	210	210	280	210	280	280	280	280	280
Diameter material inlet	mm	40	40	40	40/50	40	40/50	50/60	60	60/70	70/89
Dimensions	W	339	339	275	339	276	568	414	359	414	568
	D	268	268	308	413	308	550	511	391	511	550
	H	505	586	686	606	811	1192	915	956	1085	1192
Weight	Kg	7	8	8	10	11	12	15	15	17	25