


ATA 1.125

Adjustable Shock Absorber

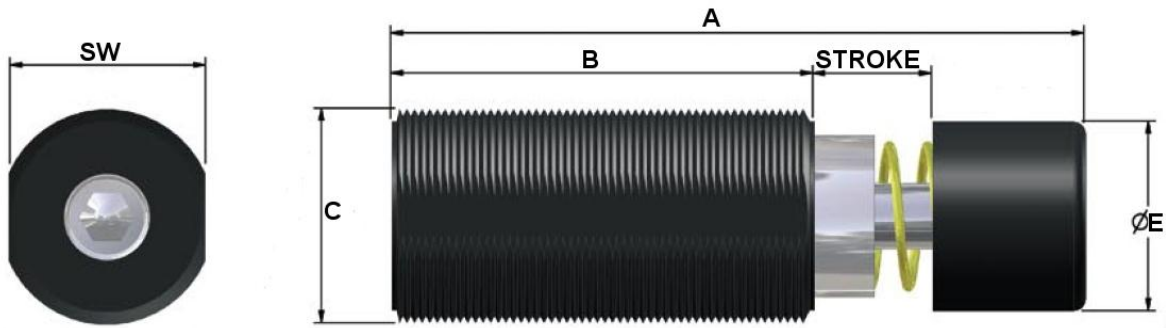

Dimensions (in inches)

| Model | Stroke | A | B | C | E | SW |
|---------------|--------|-------|-----|--------------|------|------|
| ATA 1.125 X 2 | 2 | 9.3 | 5.0 | 2 1/2-12 unf | 2.35 | 2.35 |
| ATA 1.125 X 4 | 4 | 13.25 | 7.0 | 2 1/2-12 unf | 2.35 | 2.35 |

Specifications

| Model | Energy per cycle (in-lbs) | Energy per Hour (in-lbs) | Effective Weight (lbs) |
|---------------|---------------------------|--------------------------|------------------------|
| ATA 1.125 X 2 | 22,200 | 2,220,000 | 1,100 - 138,600 |
| ATA 1.125 X 4 | 44,400 | 3,105,000 | 2,200 - 138,600 |

Technical Data

Impact velocity range: .07 to 19.7 ft/sec

Mechanical stop: integrated end stop

Operating temperature: -4° to 176° F

Materials: black oxidized body, hardened stainless steel piston rod

*Includes one locknut