


# L-filter

33824081D

ROHS compliant.  
Filter resin sealed.  
All dimensions in mm.

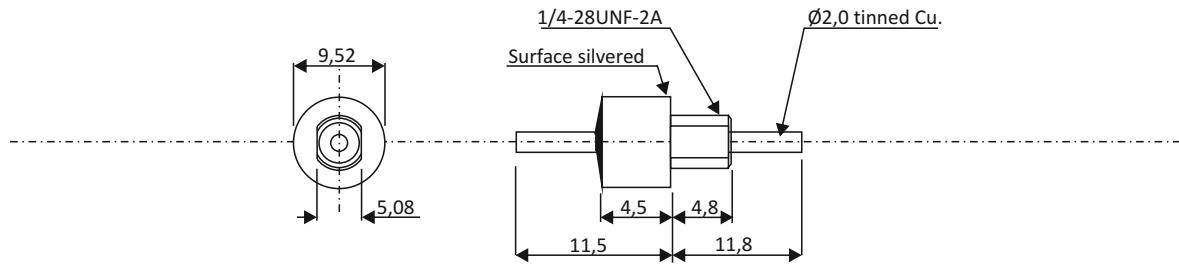

Working voltage	100Vdc
Test voltage	250Vdc 1min.
Feed-through current	max 30A
Insulation resistance	min 1000 MOhm.
IEC category	55/125/56
Capacitance (total)	1200nF min.
Inductance	1000nH min
Soldering conditions on terminals	max 250 deg C
Marking	None.
Nuts and Lockwasher included.	
Atenuation (typical values)	
0,1MHz	25dB
1MHz	45dB
10 MHz	60dB
100 MHz	70dB
1000 MHz	70dB