


# PI-filter

33824063D

ROHS compliant.

Filter resin sealed in both ends (TSE 331k ex).

All dimensions in mm.

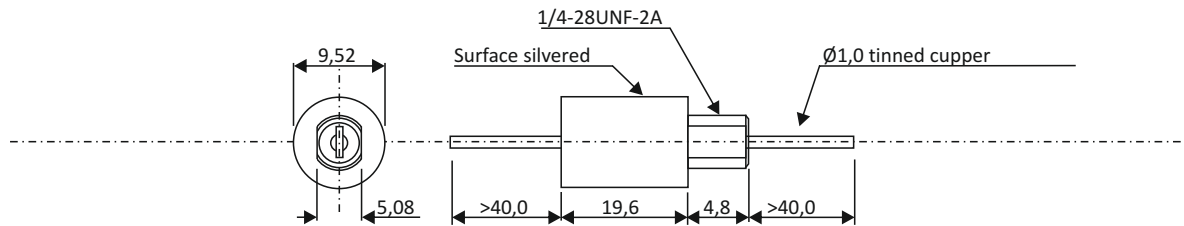

Working voltage	100Vdc
Test voltage	250Vdc 1min.
Feed-through current	max 2A
DC resistance	max 0,05 Ohm
Insulation resistance	min 10000 MOhm.
IEC category	55/125/56
Capacitance (total)	1000nF min.
Inductance	28uH min
Soldering conditions on terminals	max 250 deg C
Marking	None.

## Attenuation (typical values)

0,1MHz  
1MHz  
10 MHz  
100 MHz  
1000 MHz