


Pii-filter

33824070D

ROHS compliant.

Filter epoxy resin sealed in both ends.

All dimensions in mm.

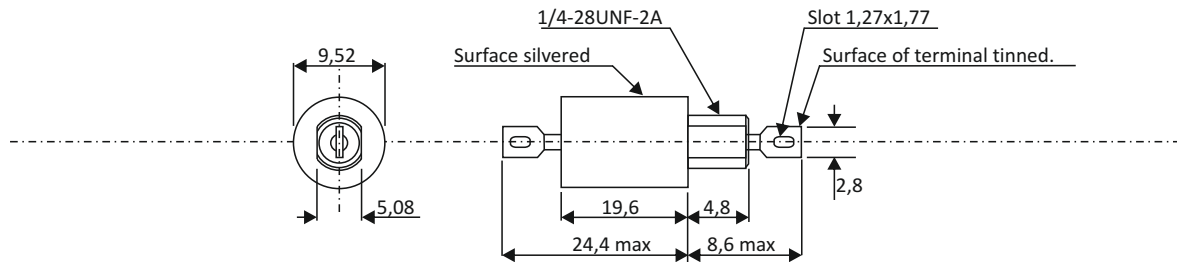

Working voltage	100Vdc
Test voltage	250Vdc 1min.
Feed-through current	max 25A
Insulation resistance	min 10000 MOhm.
IEC category	55/125/56
Capacitance (total)	2x1200nF min.
Inductance	1x3000nH min
Soldering conditions on terminals	max 250 deg C
Marking	Type/batch/Ferroperm.
Attenuation (typical values)	
0,1MHz	50dB
1MHz	70dB
10 MHz	70dB
100 MHz	70dB
1000 MHz	70dB