


GBIC-1,25Gbit/s WDM series

Bi-Directional Transceiver Module

SC Connector

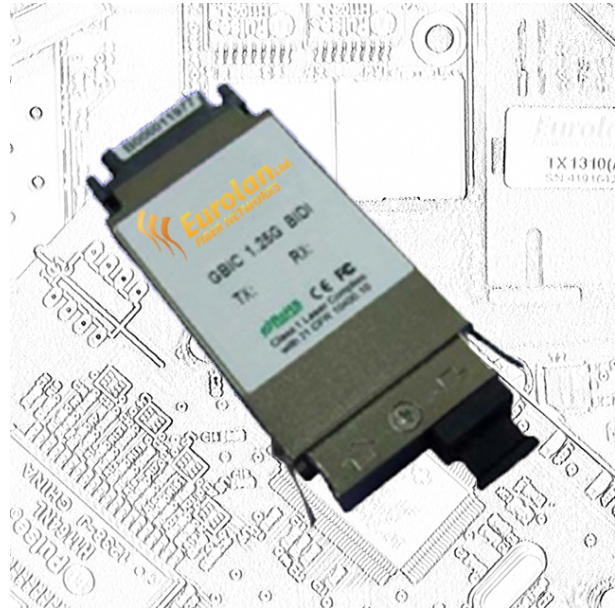

1. Features

- Compliant with Industry Standard RFT Electrical Connector and Cage
- 100Ω differential AC coupled CML Outputs
- SFP package with SC receptacle optical interface.
- Single + 3.3V Power Supply and TTL Logic Interface
- Compliant with 1.25Gb/s bi-directional data link
 - 1310nmTx/1550nmRx
 - 1550nmTx/1310nmRx
- Distance: 20km
- EEPROM with Serial ID Functionality
- 1310nm FP/DFB, 1550 FP/DFB Laser for 3Km transmission distance
- Extended Operating Temperature Range(0~70 degrees)
- Low EMI
- Class 1 Laser Product Compliant with the Requirements of IEC 60825-1 and IEC 60825-2
- RoHS compatible available

2. Application

- Gigabit Ethernet
- Fiber channel
- Switch to Switch interface