
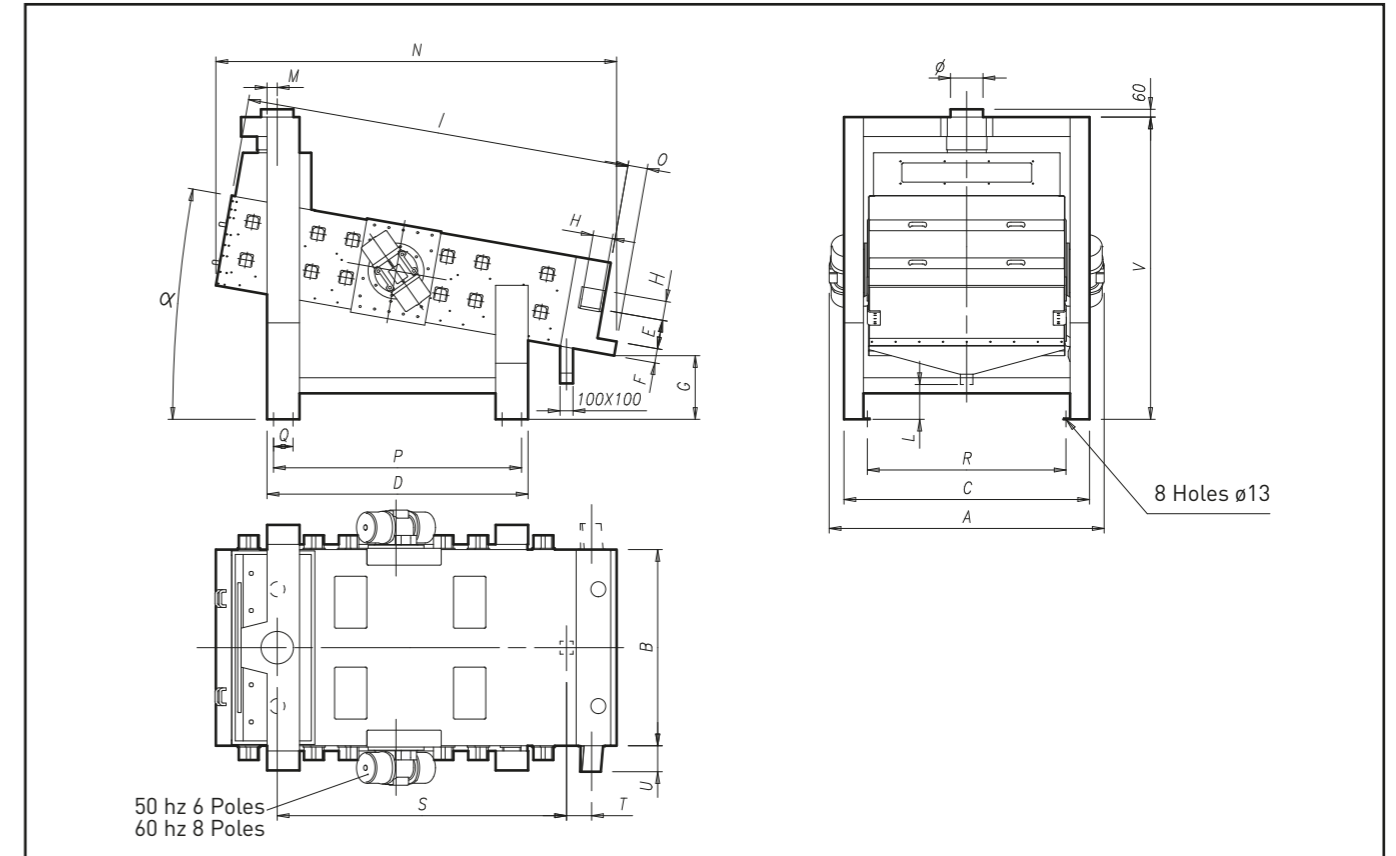


VIBROBLOCK VB

Vibro Separator

The vibro-separator model vibrobloc is designed for the cleaning of cereals by removing the coarse and fine impurities, categorized according to their size.

The sieves are held in position to the structure by specific pneumatic locking devices that can be opened by means of compressed air.

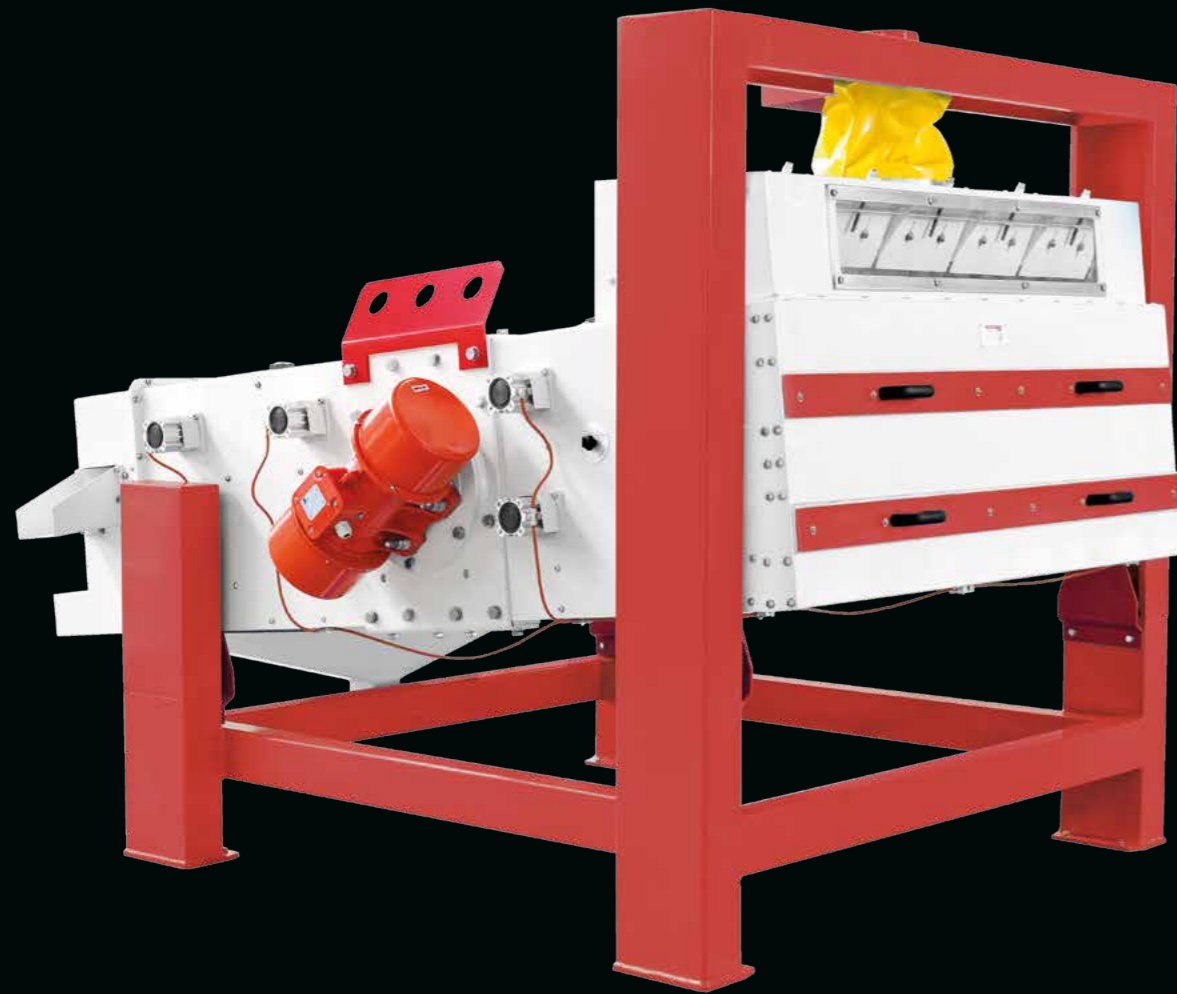

Mod. VB	Cod.	*Capacity t/h	Kw	Weight Kg	α
100/200	9102331	16	0,68x2 50Hz 0,5x2 60Hz	900	6°
100/200 Silos	9102340	70			12°
150/200	9102352	25	0,75x2 50Hz 0,5x2 60Hz	1300	6°
150/200 Silos	9102361	100			12°
150/270	9102371	30	1,1x2 50Hz 1,1x2 60Hz	1800	10°
150/270 Silos	9102380	150			15°

* Soft wheat 0,75t/m³

Mod. VB	ϕ	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T	U	V
100/200	150	1585	1011	1291	1829	160	110	483	150	2260	243	238	2410	150	1735	150	1001	1673	155	205	1867
100/200 Silos	250	1585	1011	1291	1770	160	110	483	150	2260	275	294	2380	150	1685	150	1001	1556	190	205	2076
150/200	150	2085	1511	1791	1820	160	110	479	150	2260	243	238	2410	150	1735	150	1501	1673	155	205	1867
150/200 Silos	250	2085	1511	1791	1770	160	110	479	150	2260	275	294	2380	150	1685	150	1501	1556	190	205	2076
150/270	250	2127	1511	1891	2010	220	110	472	150	2260	260	78	3086	150	1910	150	1531	2228	194	205	2328
150/270 Silos	250	2127	1511	1891	1976	220	110	472	150	2965	300	174	3037	150	1876	150	1531	2086	228	205	2556

Units = mm