

**HONDA**

# Honda Trimmers



2016 CATALOG



# GENUINE HONDA



**T**here are a lot of reasons to insist on genuine Honda handheld trimmers. That's because at the heart of every one of Honda's gas-powered handheld trimmers you'll find a legendary Honda Mini 4-stroke engine. As the world's largest engine manufacturer, Honda offers more engine experience than anyone. Experience born and tested on racetracks and roadways around the globe. Experience that continuously keeps us on the cutting edge. From automobiles, race cars, motorcycles and all-terrain vehicles to marine engines, general-purpose engines and power equipment products, Honda is committed to designing products that meet or exceed the demands of our customers across the board.

**Top Left to Right:**  
*Honda CRF450R, Honda Accord Touring, Honda BF250 Outboards*

**Above:** *Honda Advanced Robotics — Asimo*

**Right:** *HondaJet*

**Below:** *Honda UMC435 and SSET Edger Attachment*

Throughout our history, Honda has been dedicated to technological and environmental innovation, and today is no different. After all, we have a legendary reputation to live up to. A reputation for unsurpassed quality, performance and reliability. A reputation worth considering the next time you're in the market for lawn & garden handheld trimmers.



## Honda Has Just the Right Trimmer for the Job

Honda is proud to introduce the all-new VersAttach™ System! The Honda VersAttach™ is a split boom multi-flexibility tool that fits all lawn & garden needs. It can tackle just about any residential or commercial landscape need by offering two powerheads and six attachments. From edging to pruning, hedge trimming to cultivating and more, Honda's VersAttach™ is a complete system that provides convenience and versatility, and helps you save money!

Honda also offers a lineup of 4-stroke trimmers/brush cutters designed with features to take on thick grass and heavy brush without bogging down. The excellent balance and feel of these trimmers make them easy to hold and maneuver, which in turn, makes even the toughest job seem like a breeze.

Only Honda offers "Quiet Line" trimmer heads as a standard feature on SLTA models and the durable Kwik Loader® feed head on the SUKAT model. Not to mention, a harnesses and safety goggles are included with every product.

Right: Honda UMC435 and SSST Trimmer Attachment



### 4-STROKE ENGINE

## The Honda Mini 4-Stroke Advantage

Thanks to Honda's Mini 4-stroke technology, all Honda handheld trimmers are highly fuel efficient and offer excellent torque and power for demanding jobs. Plus, they run on regular gasoline so there's never a need to mix gas and oil. Like all Honda 4-strokes, they're exceptionally quiet and clean running. The end result is less smoke and less odor than 2-stroke handheld equipment, which literally means less headache for the user.

All Honda handheld trimmers offer exclusive 360° inclinable 4-stroke engines, which means they can be used and rotated in any position.



Designed to handle various applications, Honda offers two different models of the durable Mini 4-stroke engine: the GX25 and GX35. Choose the one that best fits the job at hand.



**No  
Gas/Oil  
Mixing!**



GX35 / HHT35 & UMC435

GX25 / HHT25 & UMC425

# The All-New VersAttach™ System — Versatility and Convenience Come Standard

Honda's all-new VersAttach™ System is a versatile, user-friendly power tool that's designed to take on a wide range of residential and commercial landscaping tasks. Its multi-tool flexibility provides a robust lineup of attachments to fit all lawn and garden needs.



*At the heart of VersAttach™ powerheads are GX25 and GX35 Honda Mini 4-Stroke Engines. These compact and lightweight Honda Engines offer legendary Honda reliability, easy starting, low engine noise, minimal vibration and excellent fuel economy. They're also 360° inclinable, which means they can be used, rotated and stored in any position!*

## SureLoc™ System Twist, Lock and Go!

The innovative SureLoc™ joint locking system makes it easy to connect attachments giving confidence and security. SureLoc™ takes the guesswork out of knowing if the attachment is properly secured to the powerhead.



*Push and click to lock your attachment — no tools required!*

# UMC425/UMC435

## Honda's Legendary Power and Reliability

UMC powerheads are designed for comfortable use over long periods and are powered by Honda's 4-stroke technology for minimal noise, vibration and emissions. Honda's Mini 4-stroke also offers full 360° *any-side-up* operation. Our innovative SureLoc™ system provides an intuitive and worry-free connection to any one of six optional attachments.



### UMC425 ▶

- Honda GX25 Mini 4-Stroke Engine

### ADVANTAGE Honda!

Lowest sound level (at idle and full throttle)



Lowest number of pulls to "cold start"



Longest full tank run time



### UMC435

- Honda GX35 Mini 4-Stroke Engine



*UMC powerheads are comfortable to use even for long periods of time thanks to our anti-vibration system of a rubber mounted shaft between the shaft and clutch.*



Right: Honda UMC435 and SSPP Pruner Attachment

\* When compared to a leading competitor.

# VersAttach™ Multi-Tool Flexibility

The Honda VersAttach™ features 6-in-1 versatility with a wide range of interchangeable attachments, from line trimmers, edgers and pruners to hedge trimmers, cultivators and blowers. For easy switching between attachments, we've designed the VersAttach™ around our unique SureLoc™ joint locking system. Just twist, lock and go!



## Trimmer (SSST)

Weight	3.1 lbs. (1.4kg)
Clear Path	16.5"
SureLoc™ System	✓



## Edger (SSET)

Weight	4.1 lbs. (1.9kg)
Blade Diameter	7.87" (200mm)
SureLoc™ System	✓



## Pruner (SSPP)

Weight	3.5 lbs. (1.6kg)
Blade Length	12" (Guide Bar)
Recommended Branch Thickness	2.5" (max.)
SureLoc™ System	✓



## Hedge Trimmer (SSHH-S)

Weight	4.8 lbs. (2.2kg)
Cutting Length	21.6" (550mm)
Shaft Length	5.3" (135mm)
Recommended Branch Thickness	0.25" (max.)
SureLoc™ System	✓



## Cultivator (SSCL)

Weight	7.2 lbs. (3.3kg)
Tilling Width	6.5" (166mm)
Tine Speed	233 rpm*
SureLoc™ System	✓



## Blower (SSBL)

Weight	4.85 lbs. (2.2kg)
Diameter	11 in
Blower Port	4.25" x 1"
CFM	235 (UMC425) 250 (UMC435)
SureLoc™ System	✓

\*At 10,000 rpm powerhead speed.

# VersAttach™ SPECIFICATIONS

	UMC425	UMC435
<b>ENGINE</b>		
Model	GX25	GX35
Displacement	1.53 cu. in. (25 cc)	2.18 cu. in. (35.8 cc)
Fuel	Unleaded Gasoline (86 Octane or higher)	Unleaded Gasoline (86 Octane or higher)
Fuel Tank Capacity	19.6 fl. oz.	21.3 fl. oz.
Carburetor	Diaphragm Type w/Fuel Pump	Diaphragm Type w/Fuel Pump
Idle Speed	3,100 ± 200 rpm	3,100 ± 200 rpm
Max. (no load) RPM**	10,000 rpm	10,000 rpm
<b>FRAME</b>		
Dimensions (LxWxH)	44.7 in. x 12.4 in. x 9.6 in.*	45.1 in. x 12.6 in. x 10.0 in.*
Dry Weight (lbs)	11.2*	13.2*
Engine Stop Switch	Slide Type Switch	Slide Type Switch
Throttle Control	Two Motion Trigger	Two Motion Trigger
Main Pipe Diameter	0.94 in. (24 mm)	1.02 in. (26 mm)
Main Pipe Thickness	0.08 in (2 mm) Aluminum	0.08 in (2 mm) Aluminum
Drive Shaft	Rigid Steel	Rigid Steel
Drive Support	Rubber Mounted Bushings (4)	Rubber Mounted Bushings (4)
Handle	Loop Type	Loop Type
Single Harness	Standard	N/A
Double Harness	N/A	Standard
Safety Goggles	Standard	Standard
Residential Warranty	36 months†	36 months†
Commercial/Rental Warranty	24 months†	24 months†
* Without attachment. ** Without cutting head. † See your distributor or Honda.com for details.		

## OPTIONAL ATTACHMENTS



### Cultivator (SSCL)

Dimensions (LxWxH)	31.5 in. x 9.6 in. x 10 in.
Weight	7.2 lbs. (3.3 kg)
Tine Diameter	9.4 in. (240 mm)
Tilling Width	6.5 in. (166 mm)
Warranty	See Below††



### Edger (SSET)

Dimensions (LxWxH)	27.5 in. x 7.9 in. x 14.2 in.
Weight	4.1 lbs. (1.9 kg)
Blade Length	7.87 in. (200 mm)
Warranty	See Below††




### Hedge Trimmer (SSHH-S)

Dimensions (LxWxH)	35.2 in. x 4.9 in. x 4.9 in.
Weight	4.8 lbs. (2.2 kg)
Shaft Length	5.3 in. (135 mm)
Cutter Type	Double-sided, Double-reciprocating
Blade Length	21.6 in. (550 mm)
Articulation Angle Increment	18°
Total Articulation Range	108° (-54° ~ +54°)
Warranty	See Below††



### String Trimmer (SSST)

Dimensions (LxWxH)	28.5 in. x 12.2 in. x 7.9 in.
Weight	3.1 lbs. (1.4 kg)
Cutting Swatch	16.5 in.
Driveshaft Type	Solid Steel
Maximum Spindle Speed	6900 RPM
Head Type	2-Line Bump-Feed
Trimmer Line Diameter	0.105 in.
Warranty	See Below††
Optional Accessories Kit	Blade holder B*** 72621-VF9-003



### Blower (SSBL)

Dimensions (LxWxH)	34 in. x 11 in. x 6.3 in.
Weight	4.85 lbs. (2.2 kg)
Maximum Air Speed	
UMC425	184 mph
UMC435	196 mph
Maximum Air Volume	
UMC425	235 cfm
UMC435	250 cfm
Warranty	See Below††



### Pruner (SSPP)

Dimensions (LxWxH)	30.9 in. x 3.3 in. x 5.5 in.
Weight	3.5 lbs. (1.6 kg)
Bar Length	12 in.
Shaft Length	25 in. (635 mm)
Chain Type	Oregon 91 Series 3/8" pitch x 0.050" gauge x 45 links
Sharpening file	Round 5/32 in.
Warranty	See Below††

†† 36 month Residential Warranty, 24 month Commercial/Rental Warranty. See your distributor or Honda.com for details.  
 \*\*\* This part is required when installing any other trimmer head.

# HHT25SLTA

## Honda's Lightest 4-Stroke Trimmer

For homeowner and commercial trimming needs, the HHT25SLTA Honda String Trimmer provides ample power and torque. Equipped with a standard loop handle, this lightweight trimmer is especially easy to use. And because of the Honda Quick Start System, the HHT25SLTA requires minimal effort to start. This model can easily accommodate a variety of cutting blades with an optional barrier kit.



*The HHT25SLTA comes equipped with solid trigger design for excellent durability.*





# HHT35SLTA

## Heavy-Duty 4-Stroke Trimmer

The HHT35SLTA Honda String Trimmer is ideal for the commercial user or homeowner whose requirements include heavy-duty trimming and brush removal. This model comes standard with loop handle, semi-matic line feed for ease of use and single harness for superior balance and support.



Honda trimmers can accommodate a variety of 9" or 10" cutting blades. Blade Barrier Kit (above right) also available.



Deflector design offers operator excellent visibility.




All Honda Trimmers come standard with either a single or double harness for added control. (Double harness standard with HHT35SUKAT.)



# HHT35SUKAT

## Commercial 4-Stroke Trimmer/Brush Cutter

The Honda HHT35SUKAT string trimmer features a commercial “bike” handle design for the serious professional whose needs range from regular trimming to clearing heavy brush, saplings and small trees. This model comes standard with a durable Kwik Loader® feed head, double harness and 10" saw blade.

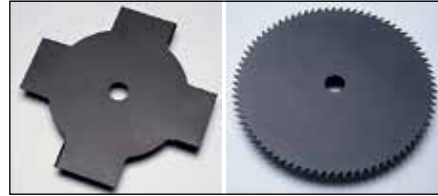

*In addition to the supplied Kwik Loader® trimmer head and 10" saw blade, available accessories include a wide variety of special purpose 9" and 10" blades.*



*Commercial “bike” handle provides increased leverage and precise control.*



*The standard Kwik Loader® trimmer head offers these time-saving features:*

- Easy and fast reloading
- No more tangled spools
- No more winding in the wrong direction
- Push-n-go in just seconds
- Handles up to 0.130" diameter line



*The adaptable Honda SUKAT trimmer is perfect for any job. It can operate with a string trimmer head or a series of different blades, depending on the task at hand.*



# TRIMMER SPECIFICATIONS

	HHT25SLTA	HHT35SLTA	HHT35SUKAT
<b>ENGINE</b>			
Model	GX25	GX35	GX35
Displacement	1.53 cu. in. (25.0 cc)	2.18 cu. in. (35.8 cc)	2.18 cu. in. (35.8 cc)
Fuel	Unleaded Gasoline (86 Octane or higher)	Unleaded Gasoline (86 Octane or higher)	Unleaded Gasoline (86 Octane or higher)
Fuel Tank Capacity	19.6 fl. oz.	21.3 fl. oz.	21.3 fl. oz.
Carburetor	Diaphragm Type w/Fuel Pump	Diaphragm Type w/Fuel Pump	Diaphragm Type w/Fuel Pump
Idle Speed	3,100 ± 200 rpm	3,100 ± 200 rpm	3,100 ± 200 rpm
Max. (no load) RPM**	10,000 rpm	10,000 rpm	10,000 rpm
<b>FRAME</b>			
Dimensions (LxWxH)	73.4 in. x 12.8 in. x 9.6 in.	73.8 in. x 12.7 in. x 10.2 in.	75.0 in. x 23.6 in. x 15.9 in.
Dry Weight (lbs)	13.0	14.8	15.4
Engine Stop Switch	Slide Type Switch	Slide Type Switch	Slide Type Switch
Throttle Control	Two Motion Trigger	Two Motion Trigger	Two Motion Trigger
Output Shaft Thread	10 mm LHT (1 in. Arbor)	10 mm LHT (1 in. Arbor)	10 mm LHT (1 in. Arbor)
Drive	Flexible Steel Cable	Flexible Steel Cable	Flexible Steel Cable
Drive Support	Nylon Support Sleeve	Nylon Support Sleeve	Nylon Support Sleeve
Gear Ratio	1.24:1	1.24:1	1.24:1
Handle	Loop Type	Loop Type	Bike Type
Cutting Head	Semi-matic Feed-Nylon	Semi-matic Feed-Nylon	Kwik Loader® 2-Line Head
Part Number	<b>72560-VH8-642AH</b>	<b>72560-VH8-642AH</b>	<b>06725-VL3-D60</b>
Line Type	.095 in. Ultra-Quiet	.095 in. Ultra-Quiet	.095 in. Ultra-Quiet
Cutting Width	17 in.	17 in.	17 in.
Single Harness	Standard	Standard	N/A
Double Harness	Optional*	Optional*	Standard
Safety Goggles	Standard	Standard	Standard
1-Year Commercial and 2-Year Residential Warranty with Limited Lifetime HHT Drive Cable Warranty†	•	•	•
Blade Type	9 in. Blades Optional***	9 in. & 10 in. Blades Optional***	Std. (50 tooth) & Opt. 10 in. Blades
Part Number	<b>72511-VF9-E00AH (22 tooth)</b> <b>72511-VF9-A02 (3 tooth)††</b> <b>72511-VF9-E32 (4 tooth)††</b>	<b>72511-VF9-D61 (50 tooth)</b> <b>72511-VF9-F00AH (80 tooth)</b> <b>72511-VF9-B02 (3 tooth)††</b> <b>72511-VF9-B00AH (4 tooth)††</b>	<b>72511-VF9-D61 (50 tooth)</b> <b>72511-VF9-F00AH (80 tooth)</b> <b>72511-VF9-B02 (3 tooth)††</b> <b>72511-VF9-B00AH (4 tooth)††</b>
Blade Barrier Kit	Optional*	Optional*	N/A
Part Number	<b>06631-VH8-740</b>	<b>06631-VH8-740</b>	

\* Must be used with all blade applications.

\*\* Without cutting head.

\*\*\* Requires Blade Barrier Kit.

† Drive cable limited lifetime warranty is valid for the original purchaser only. See your distributor for details.

†† Requires grass debris shield 76247-VF9-E31 (included with barrier kit), but must be ordered separately for the UKAT model.



**HONDA**  
**Power**  
**Equipment**

**Very Smart.**



Visit us online at [powerequipment.honda.com/trimmers](http://powerequipment.honda.com/trimmers)



For optimum performance and safety we recommend you read the owner's manual before operating your Honda Power Equipment. Specifications subject to change without notice.

All images contained herein are either owned by American Honda Motor Co., Inc., or used under a valid license. It is a violation of federal law to reproduce these images without express written permission from American Honda Motor Co., Inc., or the individual copyright owner of such images. All rights reserved. Honda the Honda Power Equipment logo, Honda Power Equipment model names and their trade dress are trademarks of Honda Motor Co., Ltd. used under license from American Honda Motor Co., Inc. Many Honda engine, trimmer, and vehicle model names, and associated trade dress may be seen at [www.honda.com](http://www.honda.com). ©2016 American Honda Motor Co., Inc. C0600