

EV Traction Dry Cell Batteries

JLG APPROVED PART



Discover Lower Cost of Ownership!

JLG offers Discover® EV Traction batteries that are non-hazardous to the environment and are maintenance free. With longer life cycles and increased performance, EV Traction dry cell batteries are the solution to your stored energy needs. Please contact the Parts Marketing team at 1-877-554-5438 or jdmartin@jlg.com for more information.

Dry Cell Technology:


- Extended run time and battery life
- Copper and stainless steel terminals
- Sealed technology
- Charge retention rate of 97-99% per month

Environmental Benefits:

- Environmentally regulated battery of choice
- 99.9% gas recombination efficiency
- Made from recycled materials
- 98% recyclable



Reduce your cost-to-own over the life of the battery:
True cost of the battery, manufacturer's recommended maintenance schedule.

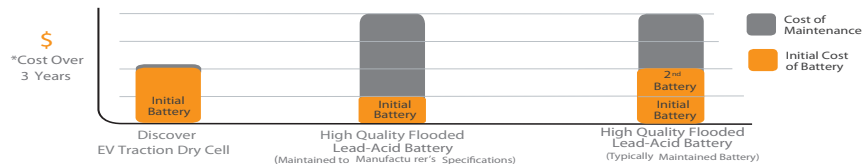

Related Item:

QuiQ Programmer (Kit No. 2915230):

- Modify the charge algorithm in your QuiQ charger

Features/Benefits:

- Kit includes USB cable and interface module
- Reprogramming Software
 - Add or remove a charge algorithm
 - Select different charge algorithm for charging



JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 877-554-5438
Fax 717-485-6417
www.jlg.com

To Order:
Visit us online at onlineexpress2.jlg.com
Call us at 1-877-554-5438
Fax your order to 1-800-733-8939

EV Traction Flyer
July 2014

An Oshkosh Corporation Company

Putting your work above everything.®

EV Traction Dry Cell Batteries

JLG APPROVED PART



Program Details

Discover [®] EV Traction Dry Cell Batteries																
JLG Item Number	Industry Group Size	Volts	20HR*	Minutes of Discharge			RC @25A	CA @ 0°F(-18°C)	Length		Width		Total Height		Weight	
				@25A	@56A	@75A			in	mm	in	mm	in	mm	lbs	kgs
70010347	L16	6	390	915	374	255	841	1350	11.6	295	7.1	180	16.8	426	122.8	55.7
70010529	GC2	6	255	561	223	146	535	850	10.2	260	7.1	180	11.6	295	86.0	39.0
70010530	GC2	6	225	501	192	131	426	775	10.2	260	7.1	180	10.8	274	77.2	35.0
70010531	GC2	6	213	475	182	124	404	750	10.2	260	7.1	180	10.8	274	69.2	31.4
70010532	27	6	200	446	171	116	379	675	12.0	306	6.6	168	8.9	225	67.2	30.5
70010533	250	6	260	572	228	149	546	900	11.6	295	7.1	180	11.7	296	82.0	37.2
70010534	305	6	312	736	295	208	660	1050	11.6	295	7.1	180	14.5	368	107.8	48.9
70010535	GC2	8	170	361	115	75	330	750	10.2	260	7.1	180	10.8	274	66.1	30.0
70010536	305	8	230	533	214	151	478	1050	10.2	260	7.1	180	14.5	368	102.1	46.3
70010537	L16	8	312	732	299	204	673	1450	11.0	280	7.2	182	15.7	399	117.1	53.1
70010538	U1	12	33	53	19	12	52	235	7.8	198	5.2	132	7.2	182	22.3	10.1
70010539	22	12	55	97	37	23	92	275	9.1	230	5.4	138	8.8	224	35.3	16.0
70010540	34	12	70	130	48	32	120	375	10.2	260	6.3	159	7.2	183	45.2	20.5
70010541	24	12	84	161	57	38	150	475	10.7	272	6.8	172	8.9	226	56.2	25.5
70010542	27	12	100	197	77	52	185	600	12.7	323	6.8	172	8.9	226	64.2	29.1

More information:

- Free freight on orders of \$2500
- Industry leading warranty
- Local distribution and recycling
- Industry standard pricing
- Return of core is required

Battery Label Guide



JLG Industries, Inc.
 1 JLG Drive
 McConnellsburg, PA 17233-9533
 Telephone 877-554-5438
 Fax 717-485-6417
www.jlg.com

To Order:
 Visit us online at onlineexpress2.jlg.com
 Call us at 1-877-554-5438
 Fax your order to 1-800-733-8939